# HAWA-JUNIOR 40/GP SLIDING GLASS DOOR SYSTEM

Version of HAWA-Junior 40/GL system where headroom is limited. Suspension patch fitting units with decorative face plates. Normally recommended for residential or light duty commercial applications.

- > HAWA-Junior 40/GP
- > Range:


Max. door weight **40 kg**Glass thickness **8-12.7 mm**(toughened or laminated)

Max. door height 2200 mm

- > Top of glass panel close to underside of top track
- > Height adjustment facility after installation, ±3 mm
- > Choice of bottom control either clear threshold or floor channel to provide added stability for wider doors




Satin stainless steel effect finish also available, please contact us for more information

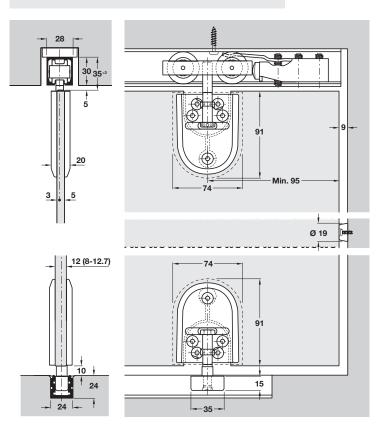









Tracks and fitting sets must be ordered separately, shown below and on page **109** 


#### **HAWA-Junior 40 tracks**





Top track side fixing profile is available, shown on page **126** 

- > Pre-drilled for mounting screws
- > Two top tracks are mounted side by side for double or multiple doors
- > Silver anodised aluminium
- > Order qty: 1 pc



 Length
 2.0 m
 3.0 m
 3.5 m

 Cat. No.
 940.40.200
 940.40.300
 940.40.350


the right to alter

Dimensional data not binding.

ICH AH 2016, © Häfele U.K. Ltd 2016.

## HAFELE

### HAWA-Junior 40/GP fitting set



- > Fitting set, for one door
- B Trolley hanger, Ø 25 mm tandem rollers, comprises trolley with M8 suspension bolt and patch suspension unit for clamping glass panel
- C Track stopper,  $18 \times 59 \times 21$  mm, for adjustable mounting in top track, zinc alloy housing, adjustable retaining force
- D Rubber buffer, Ø 20 x 10 mm, screw fixing
- E Glass panel drilling jig, to drill correct aperture in glass door panel to fit patch assembly, with drilling bush
- > Order qty: 1 set

#### 940.40.000 HAS BEEN REPLACED **by 940.41.008**




·	9 4.0
Fitting set for 1 door	HAWA-Junior 40/GP
B Trolley hanger	2 pcs
C Track stopper	2 pcs
D Rubber buffer	1 pc
E Drilling jig	1 pc
Cat. No.	940.41.008
Additional rubber buffer	
Item D	407.01.930

## HAWA-Junior 40, 80, 120 and 160/GP bottom guiding accessories and patch assembly cover plates



- - Cover plates F:
  - 1 set per panel required if clear threshold bottom guiding is used 2 sets per panel required if bottom guide channel is used



0

TCH AH 2016, © Häfele U.K. Ltd 2016. Dimensional data not binding. We reserve the right to alter specifications without notice.

 Square patches also available, please contact us for more information



- > F Patch assembly cover plates
- > Set comprises 4 rounded plates, plastic
- > Order qty: 1 set
- > G Patch fitting
- > For clamping of bottom guide to glass panel
- > Order qty: 1 set (2 sets required per panel)
- > H Bottom guide
- > For fitting to patch fitting, to keep glass door panel aligned correctly, with nylon pilot
- > Order qty: 1 pc (2 pcs required per panel)
- > I Channel
- > Pre-drilled for countersunk screws, anodised aluminium
- > Order qty: 1 pc

Patch assembly cover plates		Cat. No.
Item F		
Satin chrome		940.40.027
Stainless steel		940.40.023
Polished chrome		940.41.029
Patch fitting		
Item G		940.40.026
Bottom guide		
Item H		940.40.035
Channel	2.5 m	3.5 m
Item I	940.81.250	940.81.350



> Alternative bottom guide control options also available, shown on page **107**;

For clear threshold where no floor channel is possible, or alternative continuous guiding where floor channel is permitted

PAGE AMENDED 16.04.18/1