SLIDO DESIGN 80-M GLASS SLIDING DOOR SYSTEM SLIDO,

Allows wall mounted glass doors to slide across openings as if they were floating, unique design means all tracks and fixings are hidden. Suitable for residential or commercial applications such as offices, meeting rooms or hotels.

- > Slido Design 80-M Glass
- > Range:


For door width 800 - 1800 mm

Max. door weight 80 kg

For glass thickness 8/10 mm


Height adjustment ± 2 mm

> Includes soft closing mechanism







Drilling diagram




H = Door leaf height MH = Installed height H2 = Internal through height X = Internal through width

Installation






Running gear and bottom guiding






Slido Design 80-M Glass complete fitting set

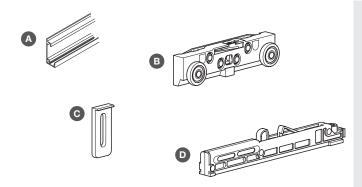

- > Fitting sets for one door
- A Rail, 1100 or 1800 mm length
- B Top running gear
- C Distance plates, 3x 1 mm, 3x 2 mm and 3x 3 mm
- D Soft close, plastic housing
- E Bottom rollers, 1 set
- F End caps set (3 pairs)
- G Distance roller
- H Rail cover profile, 1100 or 1800 mm length
- I Glass insertion profile, 1100 or 1800 mm length
- J Bottom guide profile, 1100 or 1800 mm length
- K Bottom guide
- > Order qty: 1 set

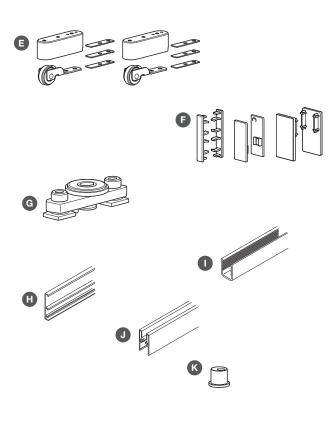


The bottom rollers need to run on a solid floor, if carpet is present then a running track

strip must be used, shown below

Fitting sets for 1 door	1100 mm	1800 mm
A Rail	1 pc	1 pc
B Top running gear	1 pc	1 pc
C Distance plates	1 set	1 set
D Soft close	2 pcs	2 pcs
E Bottom roller set	1 set	1 set
F End caps set	1 set	1 set
G Distance roller	2 pcs	2 pcs
H Rail cover profile	1 pc	1 pc
I Glass insertion profile	1 pc	1 pc
J Bottom guide profile	1 pc	1 pc
K Bottom guide	1 pc	1 pc
For 8 mm glass	940.59.004	-
For 10 mm glass	940.59.005	940.59.007

Running track for soft floors



- > Silver coloured anodised aluminium
- > Order qty: 1 pc

Length	Cat. No.
2200 mm	940.59.802
3600 mm	940.59.803