



SOFTMOVE 80 FOR HAWA-JUNIOR 80 SYSTEMS

SoftMove gently decelerates sliding doors and draws them into their final position, with no door spring-back.

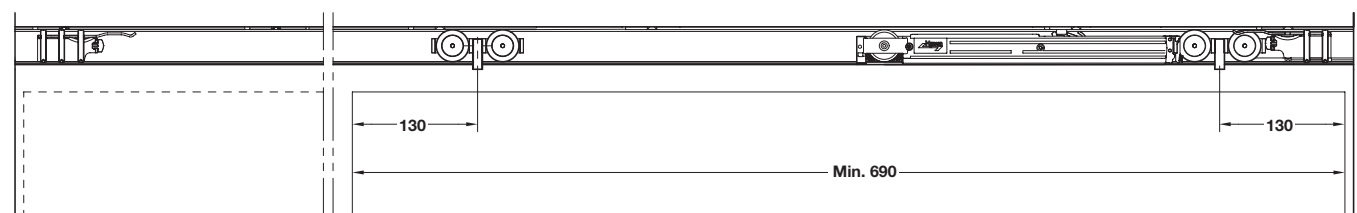


One-sided damping

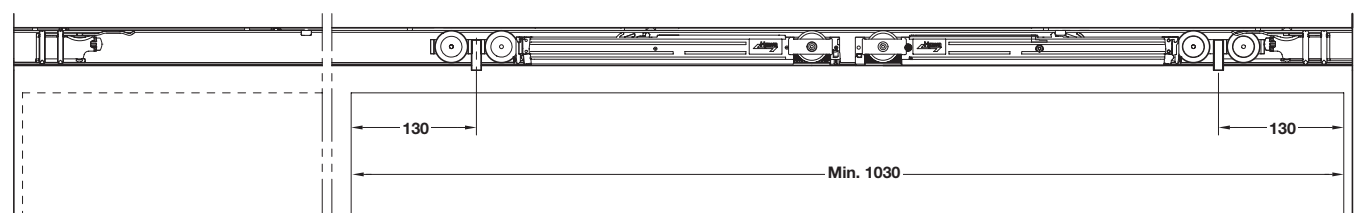

Two-sided damping

SoftMove 80 for HAWA-Junior 80

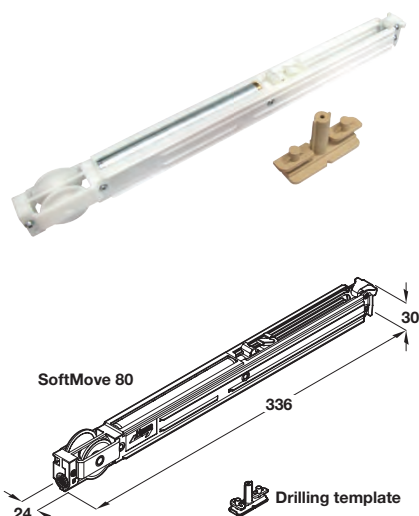

- > SoftMove gently decelerates sliding doors and draws them into their final position, with no door spring-back
- > For use with all HAWA-Junior 80 sliding door systems
- > For installation in HAWA-Junior 80 top track, screw fixes to carriage of Junior 80 trolley hanger (not included)
- > Can be installed on the opening or closing side
- > Min. door width:
 - For one-sided dampening: 690 mm
 - For two-sided dampening: 1030 mm
- > Drilling template and fitting instructions included for precise and simple installation
- > White plastic body with Ø 14 mm hydraulic metal damper
- > Order qty: 1 pc

Cat. No.
SoftMove 80
940.80.046



- > For use with all HAWA-Junior 80 sliding door systems:
 - HAWA-Junior 80 and 80/B; shown on pages **36-37**
 - HAWA-Junior 80/GL; shown on pages **114-115**
 - HAWA-Junior 80/GP; shown on pages **116-117**
 - HAWA-Junior 80/GS; shown on pages **120-121**