


Duomatic Concealed hinge 110°



Drilling pattern




- > For screw fixing
- > With automatic closing spring
- > Side adjustment from -1.5 to 4.5 mm
- > Steel cup and hinge arm
- > Order qty: 1 pc


Door overlay mm						
13	14	15	16	17	18	19
		3	4	5	6	3
Distance to cup E mm				Mounting plate height mm		

Finish	Cat. No.
Nickel plated	329.17.600

Duomatic SM cruciform mounting plate




Drilling pattern

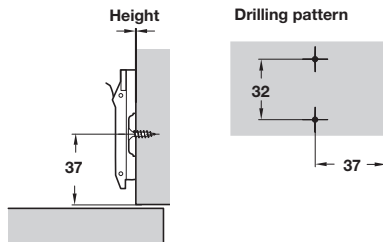


- > For screw fixing with chipboard screws
- > With quick fixing system and eccentric adjustment
- > Height adjustment from -4 to 2 mm
- > Depth adjustment from -0.5 to 2.8 mm
- > Nickel plated zinc alloy
- > Order qty: 1 pc

Height	Cat. No.
3 mm	329.71.503

Duomatic SM cruciform mounting plate



Drilling pattern

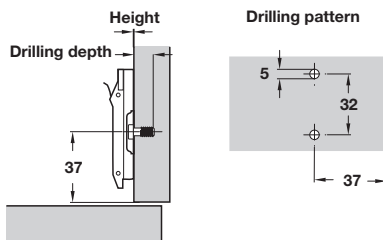

- > With pre-mounted special screws
- > With quick fixing system and eccentric adjustment
- > For side panel thickness 19 mm
- > Hole centres 32 mm
- > Nickel plated zinc alloy
- > Order qty: 1 pc

Height	Cat. No.
3 mm	329.71.513