

FESTOOL VECTURO OSCILLATOR AND ACCESSORIES

The Vecturo oscillator tool has a wide range of accessories available to order separately. With specific blades it can be used for cutting and sawing wood, plastic or metal as well as for removing silicones and putty.



- > Notches, cut outs and plunge cuts in plasterboard, wood, composite materials, coated materials, also in awkward spots
- > Removal of window glass, silicone, adhesive, bonding materials and window putty
- > Cutting all kinds of skirting board, beams and profiles to length as well as door frames and pipes
- > Sawing GRP and non-ferrous metals



Festool Oscillator VECTURO OS 400



Depth stop and alternative saw blades available separately, shown below and opposite

- > 400W motor with electronic speed adjustment switch for consistently fast working process
- > Ergonomic slimline housing with rubber-coated handle, rests perfectly in the hand
- > Greater accuracy with the depth stop, simple adjustment without using tools. Accurate sawing along scribe mark with positioning aid
- > Blades and accessories are replaced without using tools
- > Set consists of:
 - 1x Universal saw blade
 - 1x SYSTAINER SYS 2 T-LOC
- > Order qty: 1 set

	Cat. No.
Oscillator VECTURO	000.80.740

Positioning aid/depth stop set for Vecturo OS 400



- > Enables precision positioning and sawing along a scribe mark as well as plunge cuts to a defined depth
- > Positioning aid, depth stop, adapter for mounting positioning aid and depth stop without tools
- > Max. plunge depth, depth stop 56 mm, max. plunge depth, sliding shoe 20 mm, max. plunge depth with position guide 60 mm
- > Notch scale on depth adjuster 1.5 mm
- > Order qty: 1 pc

	Cat. No.
Positioning aid/Depth stop	000.80.741

Saw blade for wood, for use with Vecturo OS 400 oscillator




HSB 50/35/J



HSB 50/45/J



HSB 50/55/J

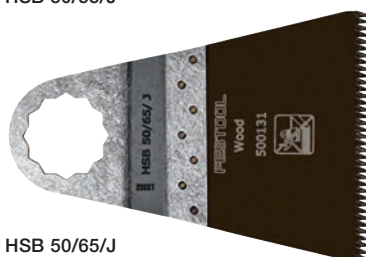


HSB 50/65/J

- > Two rows of original Japan teeth for high-precision cuts and clean cutting edges
- > Application: Solid wood or raw/coated chipboard
- > Note: Plunge-cuts not possible
- > Order qty: 1 pc

Model	Length	Width	Cat. No.
HSB 50/35/J	50 mm	35 mm	000.50.780
HSB 50/45/J	50 mm	45 mm	000.50.781
HSB 50/55/J	50 mm	55 mm	000.50.782
HSB 50/65/J	50 mm	65 mm	000.50.783


Saw blade for wood, for long straight cuts, for use with Vecturo OS 400 oscillator

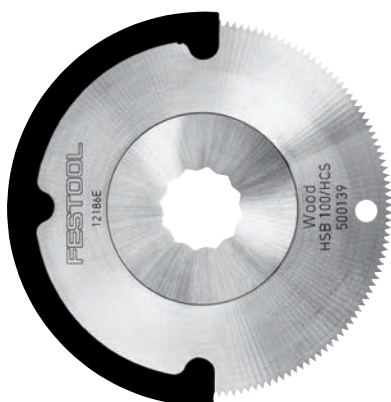

- > For long straight cuts and cutting out sections of laid parquet or laminate flooring
- > Application: Solid wood or raw/coated chipboard
- > Ideal for use in combination with depth stop Cat. No. 000.80.741
- > Order qty: 1 pc

Model	Cat. No.
HSB 100/HCS	000.50.784

Saw blade, offset, for use with Vecturo OS 400 oscillator

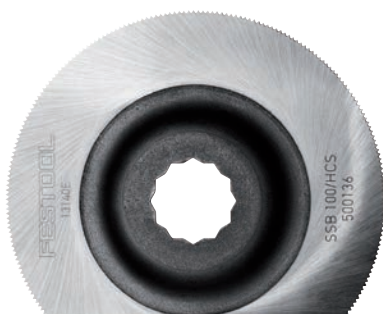


- > Segmented, for working right into corners
- > Countersunk clamping screw is perfectly flush
- > Order qty: 1 pc

Model	Cat. No.
SSB 100/HCS	000.50.790

Saw blade for wood and plastic, for use with Vecturo OS 400 oscillator




USB 78/32/Bi

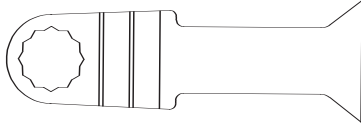

USB 78/42/Bi



USB 50/35/Bi

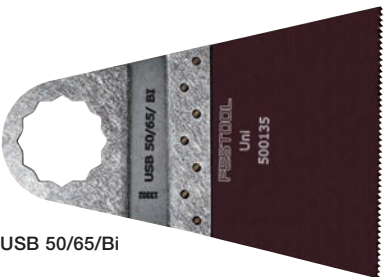

USB 50/65/Bi

- > Application: For interior fitting, for hardwood, softwood and all other types of wood, also suitable for all types of plastic and plasterboard
- > High cutting speed
- > Extremely durable and robust
- > Order qty: 1 pc

Model	Length	Width	Cat. No.
USB 78/32/Bi	78 mm	32 mm	000.50.785
USB 78/42/Bi	78 mm	42 mm	000.50.786
USB 50/35/Bi	50 mm	35 mm	000.50.787
USB 50/65/Bi	50 mm	65 mm	000.50.788

Saw blade for metal, for use with Vecturo OS 400 oscillator



- > Application: For machining aluminium and non-ferrous metals
- > With corrugated blade
- > Order qty: 1 pc

Model	Length	Width	Cat. No.
MSB 50/35/Bi	50 mm	35 mm	000.50.789

Special blade for cutting, for use with Vecturo OS 400 oscillator



- > For tasks such as cutting out putty from insulation window panes
- > Application: Plastic materials or window putty
- > Order qty: 1 pc

Model	Cat. No.
SSB 32	000.50.798

Filler blade for removing layers and coatings, for use with Vecturo OS 400 oscillator



- > Application: For removing layers and coating such as adhesive residue or silicone
- > Order qty: 1 pc

Model	Cat. No.
SSP 56.5/1	000.50.799