


CASTORS WITH Ø 80 MM WHEELS

Swivel castor, Ø 80 mm wheel, plate fixing





- > With screw on 100 x 85 mm mounting plate
- > Two enclosed ball races are fitted in the ring mount
- > Maintenance free roller bearings in the hollow steel hubs secured with hub nuts
- > Galvanized steel bracket and wheel, solid rubber profiled tyre
- > Order qty: 1 pc

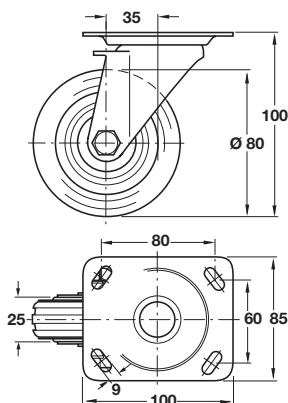

Wheel Ø	Load capacity	Without brake
Ø 80 mm	50 kg	670.01.209

Swivel castor, Ø 80 mm wheel, plate fixing

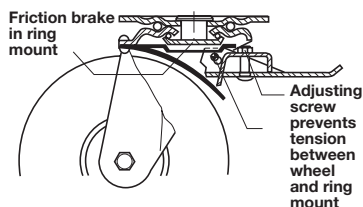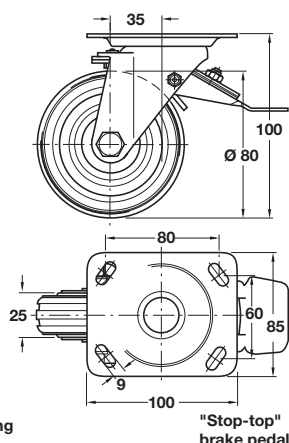


- > With screw on 100 x 85 mm mounting plate
- > Foot operated brake stops wheel rotation and castoring action simultaneously when brake pedal is applied
- > Brake is adjustable to compensate for tread, wear and tear
- > Two enclosed ball races are fitted in the ring mount
- > Maintenance free roller bearings in the hollow steel hubs secured with hub nuts
- > Galvanized steel bracket and wheel, solid rubber profiled tyre
- > Order qty: 1 pc



Wheel Ø	Load capacity	With brake
Ø 80 mm	50 kg	670.03.203

Fixed castor, Ø 80 mm wheel, plate fixing



- > Fixed castor: without swivel
- > With screw on 100 x 85 mm mounting plate
- > Low noise solid rubber wheel, without leaving marks
- > Screw fixed wheel axle, double ball bearings in ring mount
- > Galvanized steel bracket and wheel, grey solid rubber profiled tyre
- > Order qty: 1 pc



Wheel Ø	Load capacity	Without brake
Ø 80 mm	50 kg	670.02.520