


Swivel castor, Ø 125 mm wheel, with Ø 13 mm socket cap hole



Photo shows version with brake

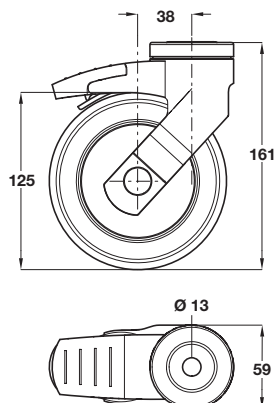


> Ø 12 mm socket cap is shown on page 111

- > For use with Ø 12 mm socket cap
- > Precision bearing for smooth operation
- > Double ball bearing swivel head for smooth operation
- > Integral thread guard for reduced dirt/dust ingress
- > Silver grey RAL 7001 plastic housing, grey non-marking thermo-plastic rubber wheel and red plastic brake
- > Order qty: 1 pc

Wheel Ø	Load capacity	Without brake	With brake
125 mm	100 kg	661.64.502	661.64.512

Swivel castor, Ø 125 mm wheel, plate fixing

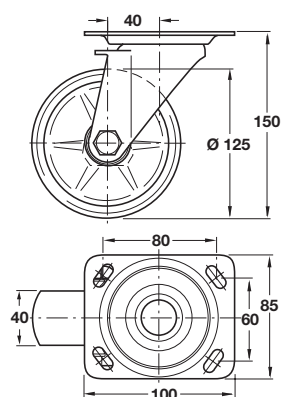

- > With screw on 100 x 85 mm mounting plate
- > Two enclosed ball races are fitted in the ring mount
- > Galvanized steel bracket
- > White polypropylene wheel with friction bearing on steel spindle and hollow steel hub
- > Order qty: 1 pc



Wheel Ø	Load capacity	Without brake
Ø 125 mm	200 kg	670.01.748