
LOOX 12V DRIVER AND ACCESSORIES

The driver is the heart of the Loox system, and is suitable for connecting to all of the world's power systems.
It has an integrated switching function and connections for all of the most popular types of switch.



12V SYSTEM

Loox 12V LED driver, constant voltage

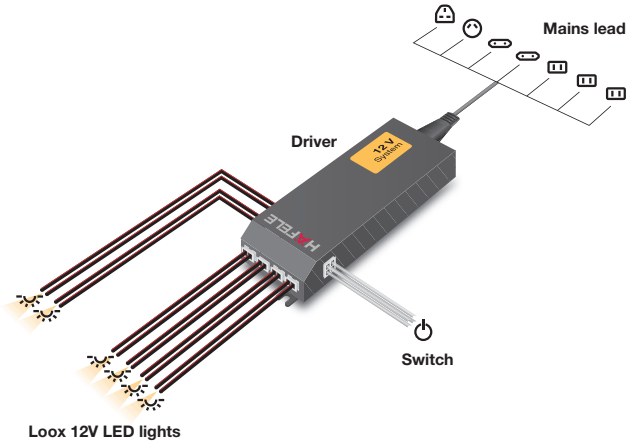

833.74.901



833.74.913



833.74.917
(flat design)

For use with Loox or Loox compatible 12V lights only

- For use with Loox or Loox compatible 12V lights only
- Input voltage: 100-240V; 50-60Hz
- Output voltage: DC 12V
- Max. recommended lead length from driver to switch: 6000 mm (leads not included)
- With integrated controller
- 6 sockets for 12V lights
  1 socket for switch (switches shown on pages **107-111**)
  1 socket for country-specific mains lead
- Plastic
- Order qty: 1 pc

12V | Parallel | IP20 | Fixings included ✔

SELV

Length x width x height	Wattage	Black	White
With socket for switch			
140 x 43 x 20 mm	0 - 15W	833.74.900	-
128 x 50.5 x 14 mm (flat)	0 - 20W	833.74.917	833.74.918
195 x 43 x 28 mm	0 - 30W	833.74.901	-
208 x 56.5 x 30 mm	0 - 60W	833.74.913	833.74.914
Without socket for switch			
128 x 50.5 x 14 mm (flat)	0-15W	833.74.941	-

Loox mains leads



UK Moulded plug version



Bare ended version

Country specific mains leads are available - more info on request

- Voltage: 250V
- Length: 2000 or 5000 mm
- Black plastic
- Order qty: 1 pc

Type	Voltage	2000 mm	5000 mm
Moulded plug	250V	833.89.000	833.89.080
Bare ended	250V	833.89.009	-

TCH DESIGN 2017. © Häfele U.K. Ltd 2017. Dimensional data not binding. We reserve the right to alter specifications without notice.