


Accuride 7957 ball bearing runners, full extension





Functionality



Disengage by operating the metal release lever in the drawer rail



The correct side space dimension is critical for the runner to work. You must allow between +0.2mm and +0.5mm over the runner thickness.

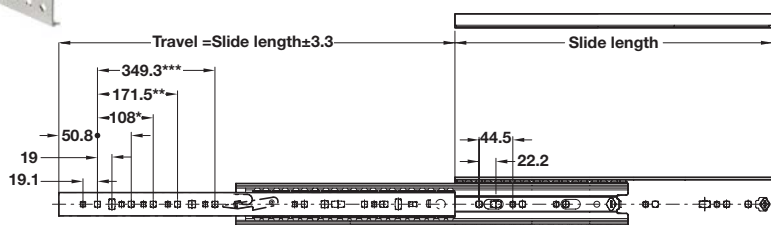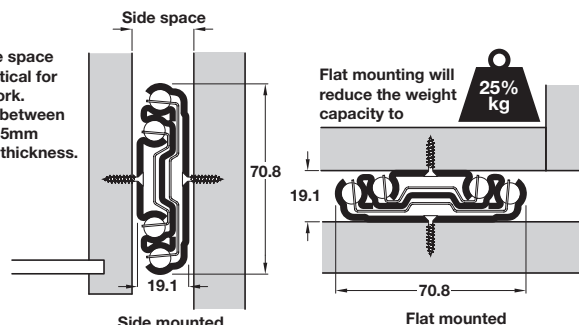

*hole not on 305/356 mm lengths
**hole not on 305-457 mm lengths
***only on 864/915 mm lengths



Mounting brackets available shown on page 234

- > For right and left hand use
- > For drawer widths up to 1000 mm
- > Can be disengaged using release lever
- > For screw fixing to cabinet, drawer or shelf, side or base mounted using brackets
- > Load carrying capacity up to 160 kg (see below for individual runner capacity)
- > Galvanized steel
- > Please note: Weight limit per pair based on length, weight limits reduce by 75% if flat mounted
- > Order fixing screws separately
- > Order qty: 1 pair



Installed/Extension length	Load capacity	Cat. No.
305 mm	140 kg	432.48.831
356 mm	140 kg	432.48.836
407 mm	150 kg	432.48.841
457 mm	150 kg	432.48.846
508 mm	160 kg	432.48.851
559 mm	160 kg	432.48.856
610 mm	160 kg	432.48.861
661 mm	160 kg	432.48.866
711 mm	160 kg	432.48.871
762 mm	160 kg	432.48.876
813 mm	160 kg	432.48.881
864 mm	160 kg	432.48.886
915 mm	160 kg	432.48.891



Load ratings vary according to runner length. Load rating shown is for side mounting, base mounting reduces load rating to 25% of vertical rating. We recommend that a centrally positioned pull handle is used on wide drawers. Please contact us for further information if required

PAGE AMENDED
25.02.19/1

SALES DEPARTMENT 0800 171 2909

TECHNICAL SUPPORT 0800 171 2908

Page
Section **10** **231**

10

Drawer Side Systems, Drawers and Runners: Runners