


ACCURIDE 0116 SLIDING TRACK SYSTEM


Track with ball bearing mounted carriage for sliding base units, table tops or display walls.

- > Application: For sliding objects horizontally such as cabinets, claddings, display walls etc.
- > Linear motion guide and ball bearing carriage
- > Load bearing capacity: Max. 360 kg
- > Corrosion resistant
- > Mounting: Screw fixing

Application

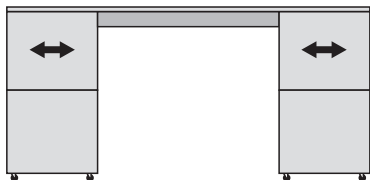

Sliding base units/table top

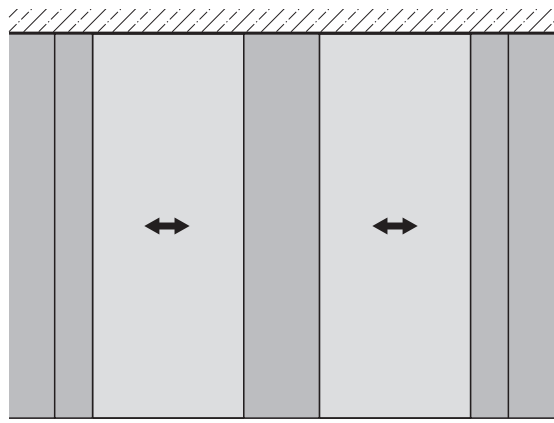

Display wall






For our full range of sliding door fittings visit www.hafele.co.uk



Load bearing capacity



The table refers to weights that are evenly distributed over the re-circulating ball carriages.

Fix track as recommended on rigid and flat surface.

Installation type	Number of re-circulating ball carriages	Ball bearing carriage	
		Stainless steel	Polymer
Bottom mounting 	1	90 kg	60 kg
	2	164 kg	109 kg
	3	211 kg	140 kg
Wall/side panel mounting 	1	150 kg	100 kg
	2	290 kg	180 kg
	3	360 kg	240 kg
Top mounting 	1	120 kg	80 kg
	2	211 kg	141 kg
	3	270 kg	180 kg

The specified values apply to performed test distance of 80,000 m

Accuride 0116 track

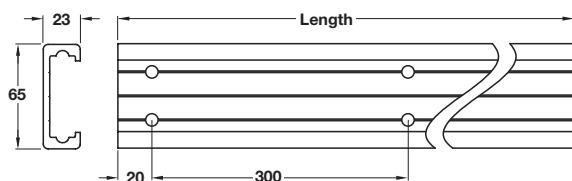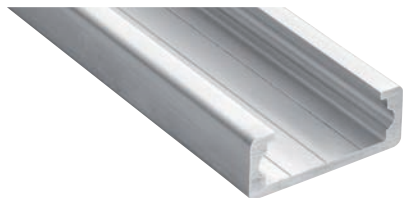

- > Not drilled
- > Can be cut to required length, butted together for infinite lengths if aligned accurately
- > Corrosion resistant
- > Aluminium
- > Order fixing screws separately
- > Order qty: 1 pc



Length	Cat. No.
2400 mm	421.59.111
3600 mm	421.59.112

YOU ALSO NEED:



BALL CARRIAGE
Page 247



END STOP
Page 247

OPTIONAL ACCESSORIES
Page 247-248