


Spax screw, countersunk head

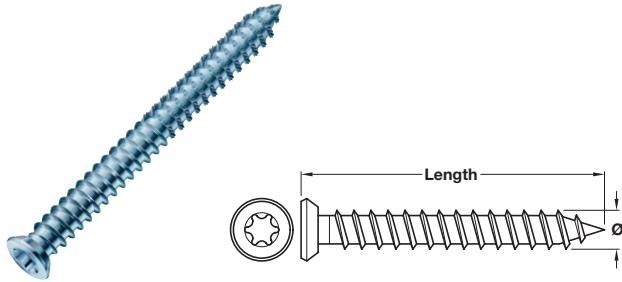

- > Frame anchor screw, for fastening into wood, stone and concrete
- > Fully threaded
- > Countersunk head with T star
- > Wirox coated

Ø x Length	Driver required	Cat. No.	Order Qty
7.5 x 40 mm	TS30	018.91.501	100
7.5 x 60 mm	TS30	018.91.502	100
7.5 x 80 mm	TS30	018.91.503	100
7.5 x 100 mm	TS30	018.91.504	100
7.5 x 120 mm	TS30	018.91.505	100
7.5 x 210 mm	TS30	018.91.508	100


Spax cover cap



- > For use with Spax anchor frame screws
- > Plastic

Finish	Cat. No.	Order Qty
White	045.41.700	500

Spax screw, washer head

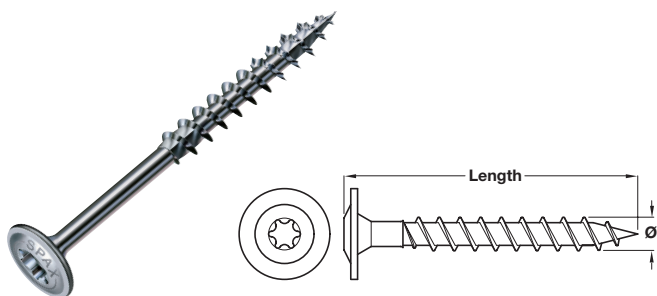

- > Fully threaded
- > Washer head with T star
- > Wirox coated

Ø x Length	Driver required	Cat. No.	Order Qty
6.0 x 60 mm	TS30	010.86.500	2000
6.0 x 80 mm	TS30	010.86.501	2000
6.0 x 100 mm	TS30	010.86.502	1000
6.0 x 120 mm	TS30	010.86.503	1000
6.0 x 140 mm	TS30	010.86.504	1000
6.0 x 160 mm	TS30	010.86.505	1000
6.0 x 180 mm	TS30	010.86.506	1000


Spax screw, flange head



- > Fully threaded
- > Flange head with PZ cross slot
- > Wirox coated

Ø x Length	Driver required	Cat. No.	Order Qty
3.5 x 17 mm	PZ2	018.40.901	200
3.5 x 20 mm	PZ2	018.40.902	200
3.5 x 25 mm	PZ2	018.40.903	200
4.0 x 13 mm	PZ2	018.40.906	200
4.0 x 17 mm	PZ2	018.40.908	200
4.0 x 20 mm	PZ2	018.40.910	200
4.0 x 25 mm	PZ2	018.40.913	200
4.0 x 30 mm	PZ2	018.40.915	200
4.0 x 35 mm	PZ2	018.40.916	200
4.0 x 40 mm	PZ2	018.40.917	200


Spax decking screw, cylindrical head

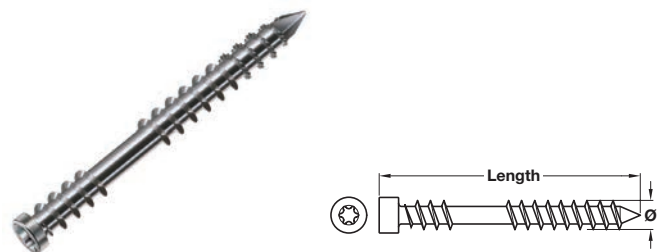

- > Maximum wood thickness 30 mm
- > Cylindrical head with T star
- > Wirox coated

Ø x Length	Driver required	Cat. No.	Order Qty
4.5 x 60 mm	TS20	018.99.014	250

Spax flooring screw, countersunk head

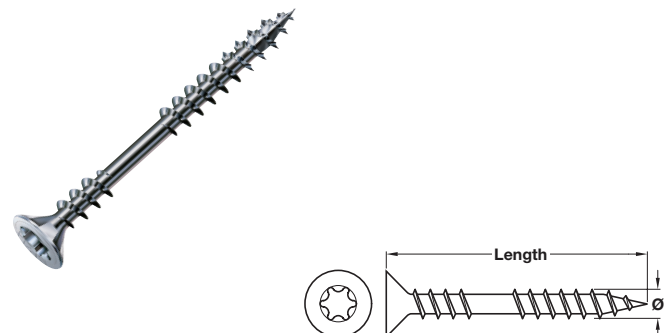

- > Countersunk head with T star
- > Wirox coated

Ø x Length	Driver required	Cat. No.	Order Qty
4.5 x 60 mm	TS20	018.99.004	300