




IXCONNECT TAB SHELF CONNECTORS

- > Pulls shelf onto side panel
- > Shelves can be quickly removed and replaced at different levels
- > Support section, screw mounting
- > Boss insert without tensioning element
- > For board thicknesses 16 to 23 mm

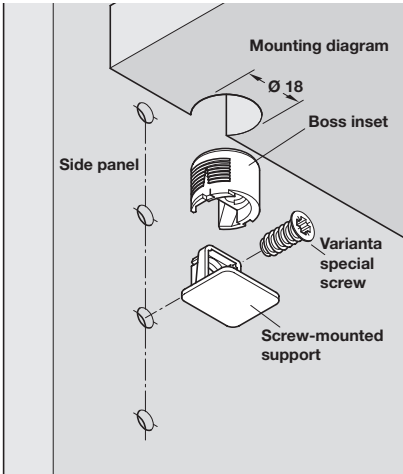

TAB shelf connectors consisting of: support and boss insert without tensioning element

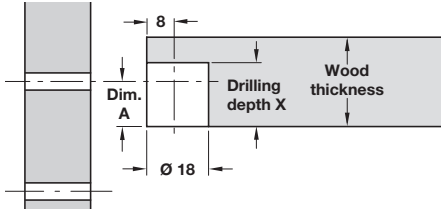


Drilling depth X = depends on type of housing and wood thickness (see order columns for details)
Dimension A = 1/2 wood thickness (see ordering table)

TAB shelf connector, screw fixing



- > Screw mounted into Ø 3 or 5 mm holes
- > For wood thicknesses from 16-23 mm
- > Zinc alloy support, plastic boss insert
- > Order qty: Multiples of 100 pcs



➔ Varianta screws shown in Section 13 pages 21-23



For wood thicknesses from	Dim. A	Drilling depth X	Nickel-plated
16 mm	8.0 mm	13.0 mm	263.73.535
19 mm	9.5 mm	15.0 mm	263.73.553



- > TAB 18 connectors shown on page 41
- > Unitool drilling jig for TAB and TAB 18 connectors can be found on page 46-47
- > Variantool-N drilling jig for drilling series-drilled holes for connecting bolts shown on page 43