


CAM LOCKS


For metal furniture.

- > 90° and 180° Closure directions
- > Closure directions can be altered by re-positioning the cam, but always moving in the same direction:
Closure direction A can be altered to D, F or G
Closure direction B can be altered to C, E or H
Closure direction 1 can be altered to 2 - 8


90° Closure directions

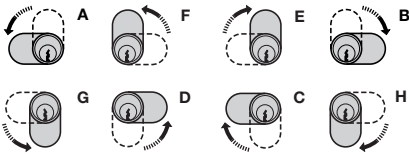

180° Closure directions

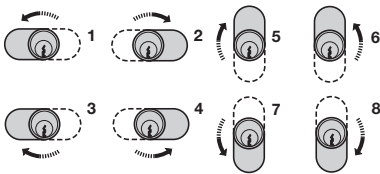

Cylinder cam lock

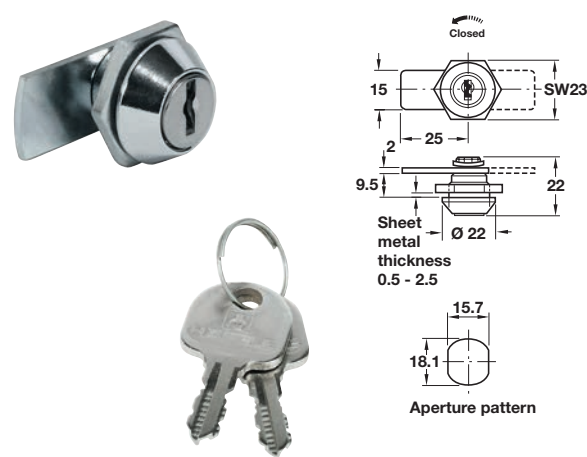


Right hand, direction A

- > With straight cam and nut attachment
- > For use with 0.8-2.5 mm sheet metal
- > Closure travel 90° or 180°
- > 90° with key trap; key can only be removed in locked position
- > 180° without key trap; key can be removed in locked and unlocked position
- > 6 plate levers = 200 possible key changes
- > Galvanized steel nut and cam
- > Polished chrome-plated zinc alloy cylinder
- > Accessories: 2x keys, 1x cam lock, 1x nut and 1x cam (pre-mounted)
- > No master key possible
- > Order qty: 1 pc

Closure direction	90° A (D,F,G)	90° B (C,E,H)	180° 1 (2-8)
Random key changes	235.72.400	235.72.430	235.72.460
Keyed alike: Key change 60-001	235.72.401	235.72.431	235.72.461

Cylinder cam lock

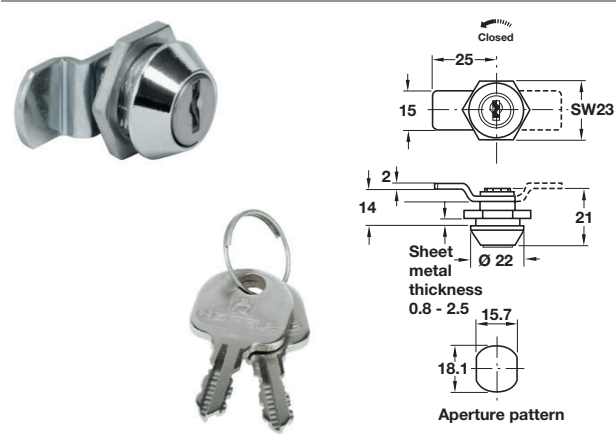

- > With cranked cam and nut attachment
- > For use with 0.8-2.5 mm sheet metal
- > Closure travel 180°
- > Without key trap; key can be removed in locked and unlocked position
- > 6 plate levers = 200 possible key changes
- > Galvanized steel nut and cam
- > Polished chrome-plated zinc alloy cylinder
- > Accessories: 2x keys, 1x cam lock, 1x nut, 1x lock washer and 1x cam (pre-mounted)
- > No master key possible
- > Order qty: 1 pc

Closure direction	180° 1 (2-8)
Random key changes	234.64.400
Keyed alike: Key change 60-001	234.64.401

TCH TECHNOLOGY 2018, © Häfele U.K. Ltd 2018. Dimensional data not binding. We reserve the right to alter specifications without notice.