



HAWA-APERTO 40/F FLUSH SLIDING DOOR SYSTEM

Parallel stacking flush sliding door system.


- > HAWA-Aperto 40/F system can accommodate parallel stacking areas only
- > For the parking area of sliding doors
- > Remaining straight run track and lower guide profile supplied in standard module sets comprising items A, B and C shown on pages **98-99**




For perpendicular stacking areas refer to HAWA-Aperto 60/H system shown in **Section 11** on page **9**

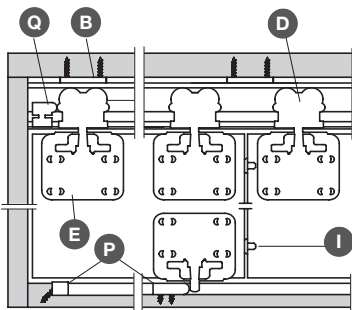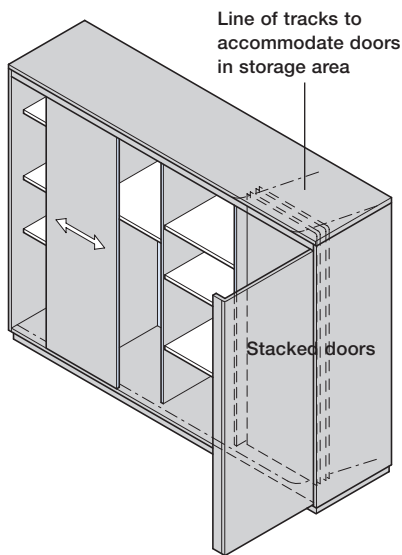

Detail of door closing off storage area

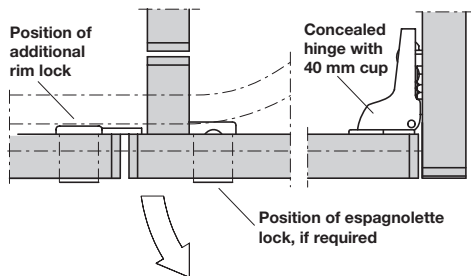

HAWA-Aperto 40/F 75° storage area complete set

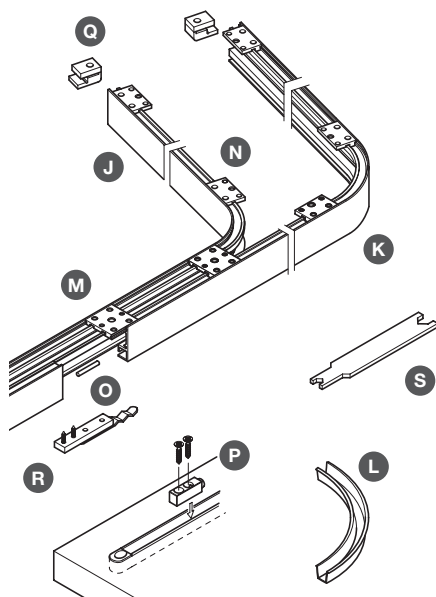

> Complete set for one door includes:

- J Curved single, internal running track. Silver anodised aluminium
- K Curved single, external running track. Silver anodised aluminium
- L Curved bottom channel. Black plastic
- M Double fixing plate. Silver anodised aluminium
- N Single fixing plate. Silver anodised aluminium
- O Connecting pins. Silver anodised aluminium
- P Set of stops, for bottom channel. Black plastic
- Q Set of stops, for top tracks. Black plastic
- R Centre stop. Black plastic
- S Socket wrench. Steel


> Order qty: 1 set (order 1 set per storage area)

Item	For 1 door
J Curved single, internal running track	1 pc
K Curved single, external running track	1 pc
L Curved bottom channel	1 pc
M Double fixing plate	1 pc
N Single fixing plate	8 pcs
O Connecting pins	6 pcs
P Set of stops, for bottom channel	1 set
Q Set of stops, for top tracks	1 set
R Centre stop	1 set
S Socket wrench	1 pc
Cat. No.	400.70.900


Supplementary items




T

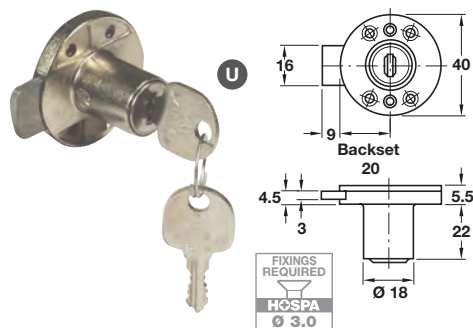

U



V



W

> Supplementary items for HAWA-Aperto 40/F

- T Concealed hinge, slide on arm Ø 40 mm cup, 15 mm crank. To hang access door to storage area
- T Mounting plate, 4 mm height. Use adequate no. of hinges to support heavier doors
- U Minilock 40 rim lock, left or right hand, random key changes, with Ø 18 mm cylinder, screw fixing. Matt nickel-plated zinc alloy
- V Cylinder rosette for use with Ø 18 mm cylinders (multiples of 100 pcs). Matt nickel-plated brass
- W Striking plate, for inset doors. Nickel-plated steel

> Order qty: 1 pc (order 3-5 pcs per door depending on door height)



These hinges are only suitable for doors up to 600 mm, for larger doors please use an alternative - contact us for further information

Item	Cat. No.
T Concealed hinge, slide on arm	323.13.625
T Mounting plate, 4 mm height	323.85.747
U Minilock 40 rim lock, left hand	230.12.704
U Minilock 40 rim lock, right hand	230.12.606
V Cylinder rosette	219.19.676
W Striking plate	239.41.013