



Threshold seal, normal rating

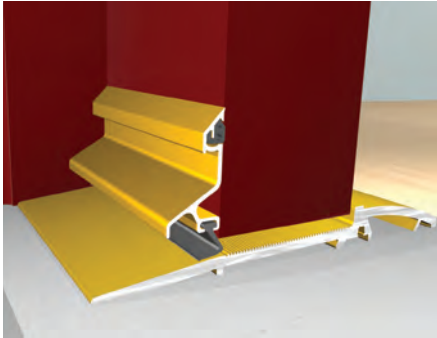


- > Suitable for hinged doors opening in and out
- > For industrial, commercial and public buildings, normal site conditions, forklift, wheelchair and trolleys, commercial and domestic vehicle
- > Designed for use with panic bolts on emergency doors, 4 mm thick profiled upstand secures bottom shoot
- > Low profile, 12 mm upstand
- > Fitting tolerance, subject to installation
- > Ends protected by weather deflecting end caps
- > Aluminium with EPDM seals
- > Order qty: 1 pc

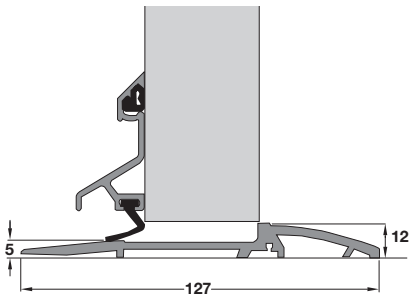


Length	914 mm	1828 mm
Cat. No.	950.17.241	950.17.242

Threshold seal

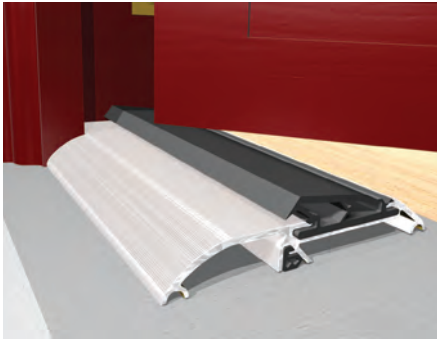

- > Suitable for hinged doors opening in and out
- > Suitability: Residential, normal site conditions, wheelchair and trolleys, domestic vehicle
- > Complies with regulation M
- > Fitting tolerance 4 mm
- > Does not present an obstacle to wheeled traffic - ideal for disabled
- > Unique design eliminates need to rebate door
- > Aluminium, EPDM seal
- > Order qty: 1 pc

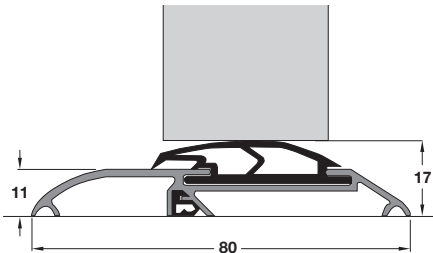

Length	933 mm	1829 mm
Cat. No.	950.17.251	950.17.252

TOH AH 2019, © Hafele U.K. Ltd 2019. Dimensional data not binding. We reserve the right to alter specifications without notice.