

LEVER ACTION FLUSH BOLTS


Flush bolts for installation in door edge, available in stainless steel, brass or steel. Bolts with extended throw (max. 40 mm) are also available, designed to be used where there is a larger than normal gap at the base of the door.

2
Door Accessories: Bolts

Lever action flush bolt



- > Maximum depth of cut out 26 mm
- > Flat shoot plate included
- > Manufacturing tolerance for this product is 0.7 mm
- > Tested in accordance with BS EN 12051:1999 and BS EN 1634:1
- > Stainless steel
- > Order qty: 1 pc

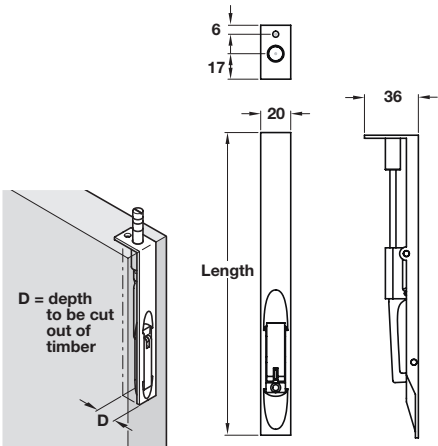

FD 30 and 60 fire rated when installed with intumescent kits Cat. No. 911.81.058 and 911.81.059, shown on page **2.38A**

ARTICLES REMOVED FROM PAGE
911.62.555 - DISCONTINUED




Length	150 mm	202 mm
Satin stainless steel	911.62.552	911.62.554
Polished stainless steel	911.62.553	

Lever action flush bolt



- > Flat shoot plate included
- > Brass
- > Order qty: 1 pc

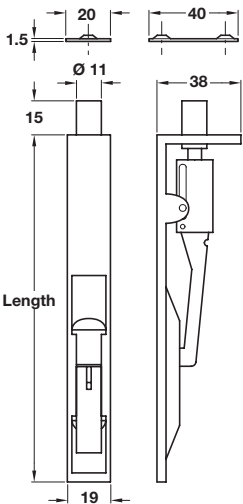

Length	152 mm	203 mm
Satin nickel-plated	911.62.125	911.62.116
Polished chrome	911.62.126	911.62.117
Polished brass	911.62.127	911.62.118
Satin anodised aluminium	911.62.128	911.62.119

PAGE AMENDED
10.02.26/3