

INTUMESCENT PADS AND PROTECTION

A range of pads and seal for FD30 and FD60 rating.

Intumescent hinge pads pack



- > Suitable for use with hinges on page 3.12
- > Mono-Ammonium Phosphate (Interdens® MAP) material
- > Suitable for both radius and square corner hinges
- > With self-adhesive backing
- > Tested in accordance with BS EN 1634-1 and BS 476: part 22 1987
- > 927.80.000:
Height x width x depth: 100 x 30 x 1mm
Fire rating FD30
- > 927.80.001:
Height x width x depth: 100 x 25 x 2mm
Fire rating FD60/90
- > Colour: White
- > Order qty: 1 pack (1 pack = 6 pads)


ARTICLES REMOVED FROM PAGE
926.66.000 - DISCONTINUED
926.66.001 - DISCONTINUED



To be used in conjunction with hinges on page 3.12

Thickness	Cat. No.
1 mm	927.80.000
2 mm	927.80.001

Intumescent sashlock pads pack

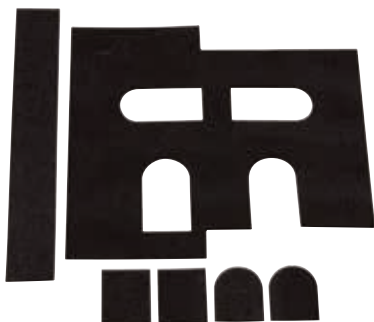

- > For sashlock
- > Unaffected by moisture, humidity and atmospheric pollution
- > Only 0.8 mm thick, so minimal rebating required
- > Very flexible and clean to work with - will bend without cracking
- > With self-adhesive backing
- > Complies with BS EN 476, part 22
- > Tested in accordance with BS EN 1635-1
- > Order qty: 1 set



Type	Cat. No.
Sashlock	911.01.990

Intumescent DIN sashlock pads pack



- > For DIN sashlock
- > Unaffected by moisture, humidity and atmospheric pollution
- > Only 0.8 mm thick, so minimal rebating required
- > Very flexible and clean to work with - will bend without cracking
- > With self-adhesive backing
- > Complies with BS EN 476, part 22
- > Tested in accordance with BS EN 1635-1
- > Order qty: 1 set



Type	Cat. No.
DIN Sashlock	911.01.991