


THRESHOLD AND WEATHER SEALS

Threshold and weather protection for a wide range of applications of sliding and hinged doors.


Retractable door seal, full mortice




- > Regular duty
- > For timber or metal doors
- > Unhanded
- > For seal gap up to 12.7 mm
- > May be trimmed on site by 152 mm to fit
- > Aluminium carrier with solid neoprene seal
- > Order qty: 1 pc

Length	914 mm	1067 mm
Cat. No.	950.07.544	950.07.546

Hawa Sealing and buffer profile




The door requires two grooves to accommodate the profile.
The bulge of the profile is determined by the interval between the gaps

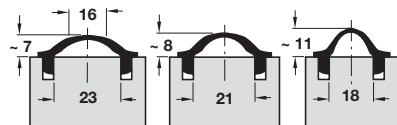

- > Installed in two grooves in the front edge of sliding doors,
- > Profile strip absorbs impact noise and prevents possible finger injury from forceful closing
- > Seals the door when closed
- > Neoprene
- > Order qty: 1 roll (= 5 m lengths)

Finish	Brown	Black
Cat. No.	940.00.521	940.00.530

Slide-pile weather strip

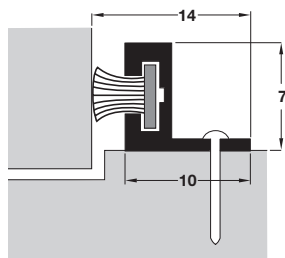

- > Suitable for both hinged and sliding doors, windows
- > Inward or outward opening
- > Suitability: Residential, commercial and public, industrial and normal site conditions
- > Resilient polypropylene pile in aluminium carrier
- > Stainless steel pin fixing included
- > Aluminium carrier, polypropylene pile seal
- > Order qty: 1 pc



Length	Cat. No.
2134 mm	950.17.270