



TECTUS TE 540 3D Energy hinge

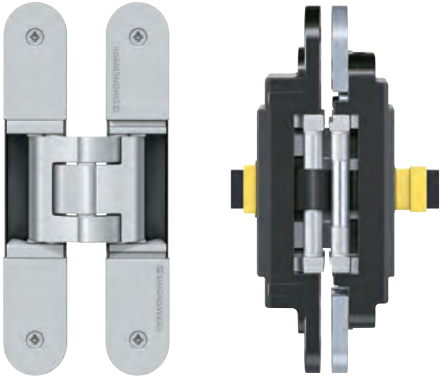

- > With permanent energy transfer
- > Maximum adjusted door weight 120 kg
- > 3-way continuous adjustment:
 - Vertical: ± 3 mm
 - Horizontal: ± 3 mm
 - Depth: ± 1.0 mm
- > For wooden, steel or aluminium frames, for flush doors
- > For min. door thickness 40 mm
- > Maintenance free friction bearings
- > Suitable for left or right hand applications
- > Aluminium, zinc diecast and steel
- > Order qty: 1 pc

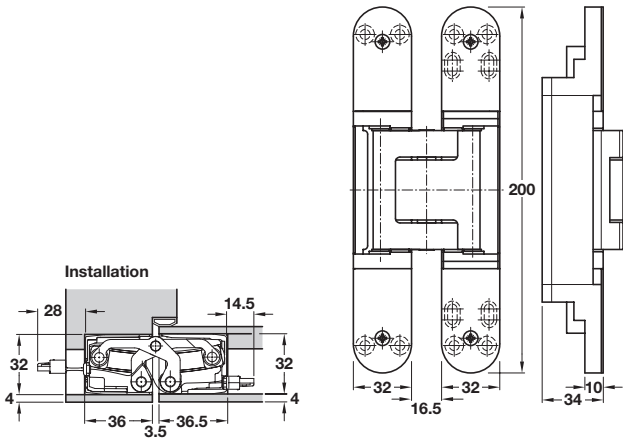


FD 30 fire rated when installed with intumescent kit Cat. No. 924.19.132, shown on page 84




Finish	Cat. No.	
Matt chrome	924.17.241	
Matt nickel	924.17.306	
Satin stainless steel	924.17.240	

TECTUS TE 640 3D Energy hinge

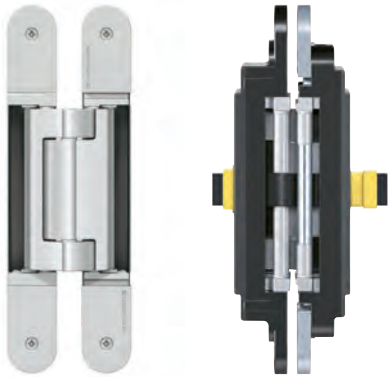

- > With permanent energy transfer
- > Maximum adjusted door weight 200 kg
- > 3-way continuous adjustment:
 - Vertical: ± 3 mm
 - Horizontal: ± 3 mm
 - Depth: ± 1.0 mm
- > For wooden, steel or aluminium frames, for flush doors
- > For min. door thickness 40 mm
- > Maintenance free friction bearings
- > Suitable for left or right hand applications
- > Aluminium, zinc diecast and steel
- > Order qty: 1 pc

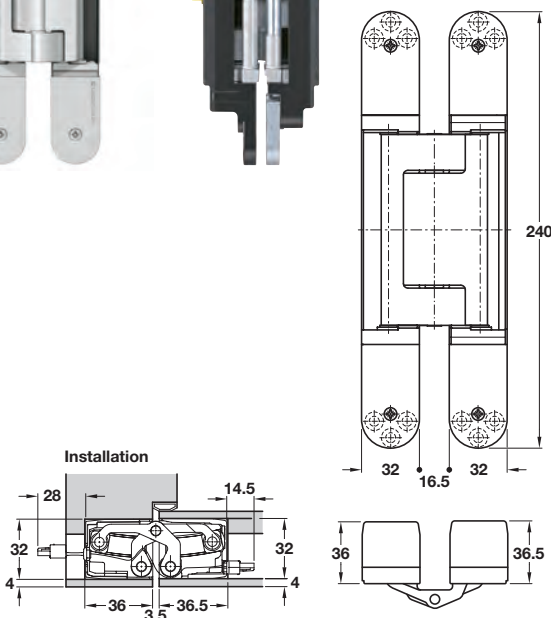

Finish	Cat. No.	
Matt chrome	924.17.434	
Matt nickel	924.17.436	
Satin stainless steel	924.17.430	



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.