




TECTUS TE 645 3D Energy hinge

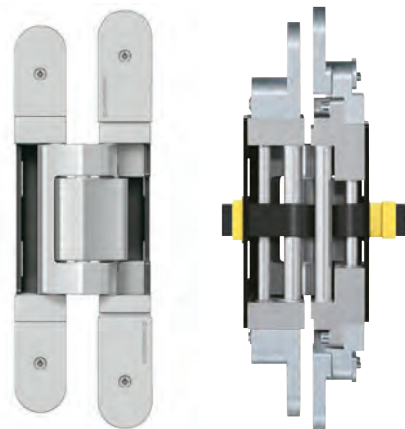

- > With permanent energy transfer
- > Maximum adjusted door weight 300 kg
- > 3-way continuous adjustment:
 - Vertical: ± 3 mm
 - Horizontal: ± 3 mm
 - Depth: ± 1.0 mm
- > For wooden, steel or aluminium frames, for flush doors
- > For min. door thickness 44 mm
- > Maintenance free friction bearings
- > Suitable for left or right hand applications
- > Aluminium, zinc diecast and steel
- > Order qty: 1 pc

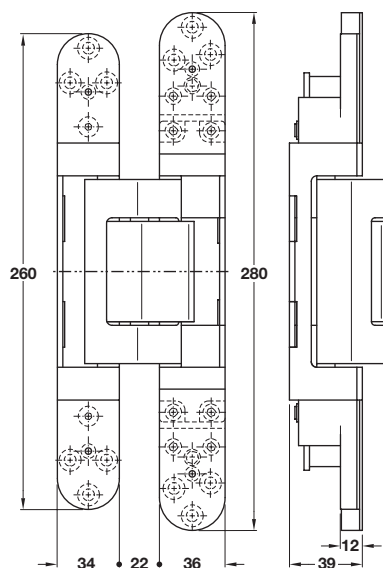

Installation



Finish	Cat. No.
Matt chrome	924.19.104
Matt nickel	924.19.116
Satin stainless steel	924.19.110



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.