

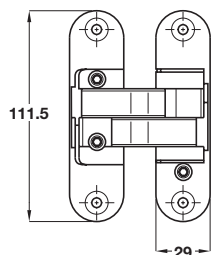


Startec Concealed mortise 3D hinges

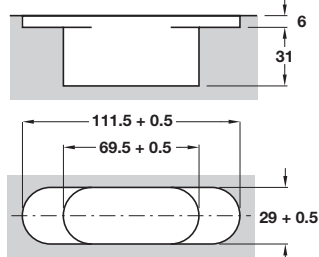


Frame and door drilling pattern



- > For wooden frames, for flush wooden interior doors
- > Order fixing screws separately
- > Zinc alloy
- > Order qty: 1 pc

Weight table

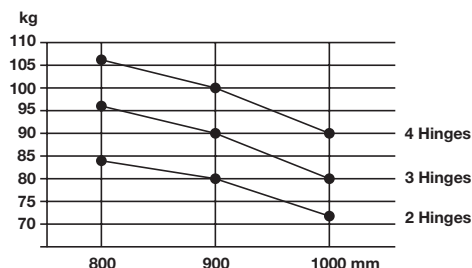


Finish	Left	Right
Matt nickel-plated	927.32.006	927.32.016
Polished nickel-plated	927.32.007	927.32.017
Polished gold coloured	927.32.008	927.32.018

3D Concealed 180° cabinet hinge




Installation



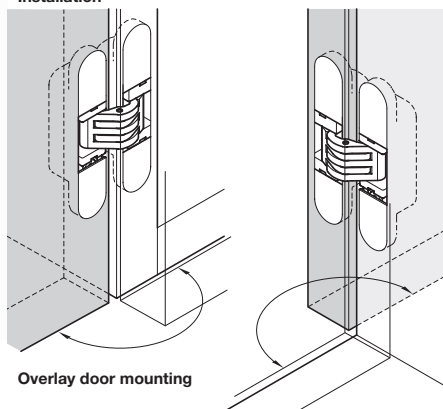


- > For wood thickness from 18 mm
- > For overlay or inset mounting
- > Adjustment: Height ± 1.5 mm, side ± 1 mm, depth ± 1.5 mm (with overlay mounting). Height ± 1.5 mm, side ± 1.5 mm, depth ± 1 mm (with inset mounting)
- > Zinc alloy
- > Supplied with 4x cover caps
- > Order fixing screws separately
- > Order qty: 1 pc

Note
Load bearing capacity table
applies to hinged door
applications only. Please
enquire for other applications

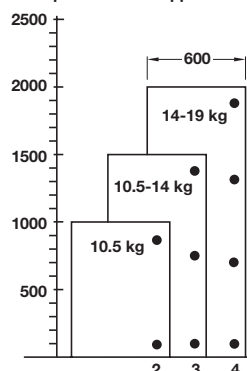

Sample measurements for
20 mm thick wood
Hinge distance min. 500 mm
Door width up to 600 mm
The door's width must not
exceed its height

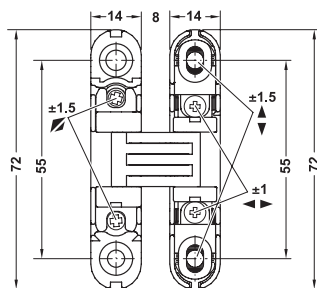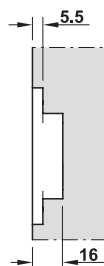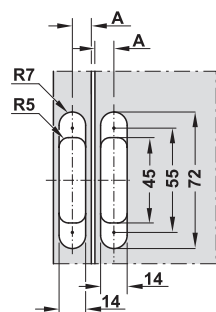

With wood thickness 18 mm: A = 9 mm
With wood thickness min. 20 mm: A = 10 mm

ARTICLES REMOVED FROM PAGE

341.24.415 Replaced by new number 341.24.435
341.24.315 Replaced by new number 341.24.335

Finish	Cat. No.
Chrome plated matt hinge, grey cover caps	341.24.435
Black hinge, black cover caps	341.24.335



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.