



Soss hinge 204A



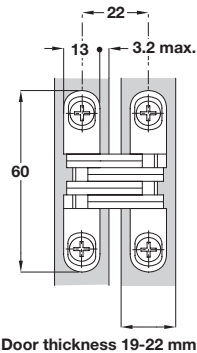


- > Allows 3 mm vertical and 2 mm depth adjustment
- > To suit door thickness 19-22 mm
- > Order qty: 1 pc



Body finish	A/B	Cat.No.
Brass-plated	6.4/18.5 mm	341.07.500

Soss 'Crimestall' hinge 218

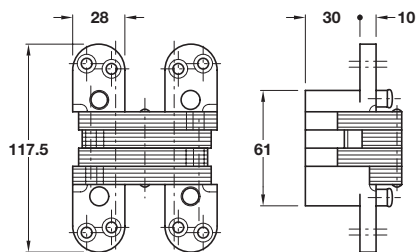

- > Application:
Version of Soss 218 hinge incorporating dog bolts with hardened steel rollers, for use on external open outward or other doors where security needs to be enhanced to prevent sawing through the hinge
- > To suit door thickness 41-45 mm
- > 3 or 4 hinges required depending on height, width and weight of door
- > Maximum door width 900 mm
- > Zinc alloy body with plated steel links and hardened steel rollers
- > Order qty: 1 pc



Body/Links	Cat. No.
Brass/Brass	927.50.105
Satin nickel/Satin nickel	927.50.107



- > Routing jigs are shown on page 109
- > Soss hinge selection guide is shown on page 108



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.