


PROJECTION HINGES

Specially drilled holes to allow the hinge leaf to clear obstructions when fully opened beyond 90°.

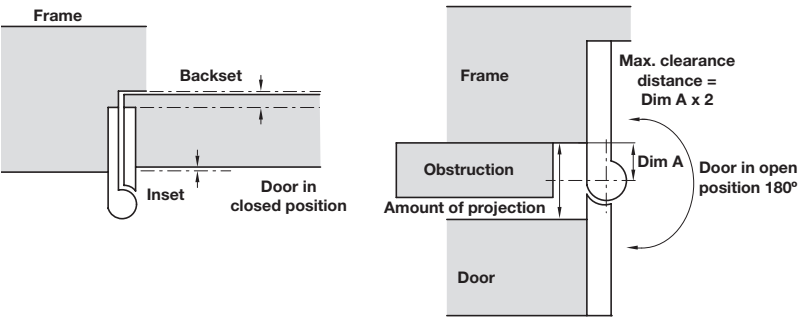


- > Projection hinges are drilled with holes towards the edge of a broad hinge leaf enabling the hinge to clear obstructions when fully open beyond 90°
- > Recommendations for installation as follows:
It is recommended that the backset should not be less than 12 mm (14 mm if using an intumescent strip)
- > When a door is to be opened beyond 90° the width of hinge required can be calculated as follows:
Door thickness plus inset (normally 1/8" or 3.2 mm) less backset
Double this and add clearance required

Brass DPBW projection butt hinge, 75 x 75 mm, max. clearance 32 mm



- > Maximum adjusted door weight 20 kg
- > Maximum clearance 32 mm
- > Double phosphor bronze washers and brass pin
- > Ø 11 mm knuckle
- > Order fixing screws separately
- > Brass
- > Order qty: 1 pc

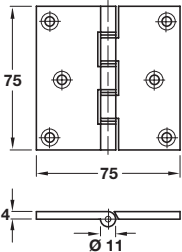


Finish	Cat. No.
Self coloured	921.08.601
Polished brass	921.08.600
Satin chrome	921.08.604

Brass DPBW projection butt hinge, 100 x 102 mm, max. clearance 44 mm



- > Maximum adjusted door weight 40 kg
- > Maximum clearance 44 mm
- > Double phosphor bronze washers and brass pin
- > Ø 11 mm knuckle
- > Order fixing screws separately
- > Brass
- > Order qty: 1 pc

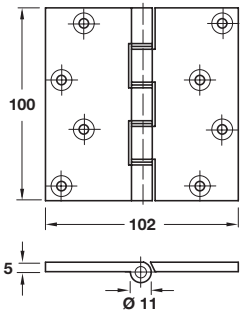

Finish	Cat. No.
Self coloured	921.08.061
Polished brass	921.08.060
Satin chrome	921.08.064