

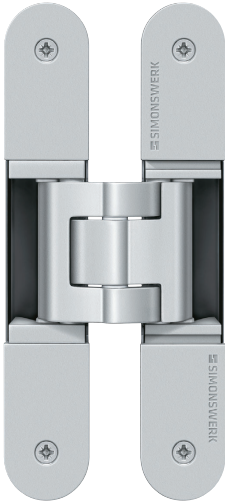


TECTUS TE 340 3D hinge

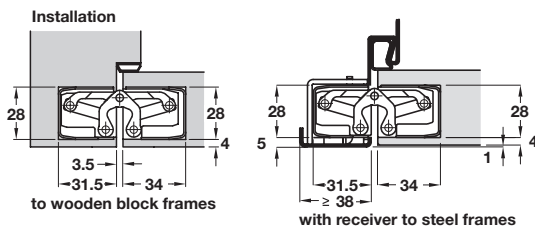

- > Maximum adjusted door weight 80 kg
- > 3-way continuous adjustment:
 - Vertical: ± 3 mm
 - Horizontal: ± 3 mm
 - Depth: ± 1 mm
- > For wooden, steel or aluminium frames, for flush doors
- > For min. door thickness 40 mm
- > Maintenance free friction bearings
- > Suitable for left or right hand applications
- > Aluminium, zinc diecast and steel
- > Order qty: 1 pc



Finish	Cat. No.
Matt nickel (f2) powder coated	924.17.122
Satin stainless steel effect	924.17.104
Matt chrome (f1) powder coated	924.17.121
Polished nickel plated	924.17.170
Polished brass plated	924.17.169
Bronze metallic	924.17.150
Matt black	924.17.137



TECTUS TE 340 3D FR is also available with intumescent built in to hinge body, FD 30 fire rated, shown on page 90

Intumescent kit to suit TECTUS 340 hinge

- > Upgrades hinge to 30 minute fire rating
- > Intumescent material, brown, 2 mm thick
- > Order qty: 1 set

Item	Cat. No.
Intumescent kit	924.17.197

Door and frame template set for TECTUS TE 340 3D hinge

- > For routing the hinge recess for TECTUS TE 340 3D
- > Aluminium
- > Order qty: 1 set

Suitable for	Set includes templates	Cat. No.
TECTUS TE 340 3D	for steps 1 and 2	924.17.619