



TECTUS TE 526 3D hinge

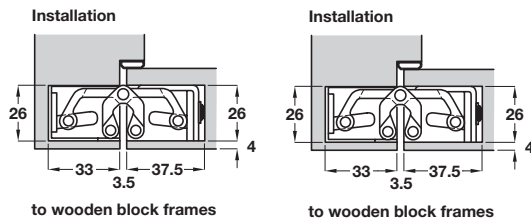

- > All stainless steel, ideal for areas where there may be hygiene, weathering or corrosion issues
- > Maximum adjusted door weight 120 kg
- > 3-way continuous adjustment
 - Vertical: ± 3 mm
 - Horizontal: ± 3 mm
 - Depth: ± 1 mm
- > For wooden, steel or aluminium frames, for flush doors
- > For min. door thickness 40 mm
- > Suitable for left and right hand applications
- > Maintenance-free friction bearings
- > Grade 304 stainless steel
- > Order qty: 1 pc



FD 60 fire rated when installed with intumescent kit Cat. No. 924.17.697, shown below



Finish	Cat. No.
Satin stainless steel	924.16.803

Intumescent kit to suit Tectus 527/526 3D hinge



- > Upgrades hinge to 60 minute fire rating
- > Intumescent material, black, 1 mm thick
- > Order qty: 1 pc

Item	Cat. No.
Intumescent kit	924.17.697

PAGE AMENDED
25.10.22/2