


TECTUS TE 540 3D hinge



- > Maximum adjusted door weight 120 kg
- > For 30 minute fire rating order intumescent kit separately
- > 3-way continuous adjustment:
 - Vertical: ± 3 mm
 - Horizontal: ± 3 mm
 - Depth: ± 1 mm
- > For wooden, steel or aluminium frames for flush doors
- > For min. door thickness 40 mm (min. 44 mm with intumescent kit)
- > Suitable for left or right hand applications
- > Maintenance free friction bearings
- > Aluminium, zinc diecast and steel
- > Order qty: 1 pc

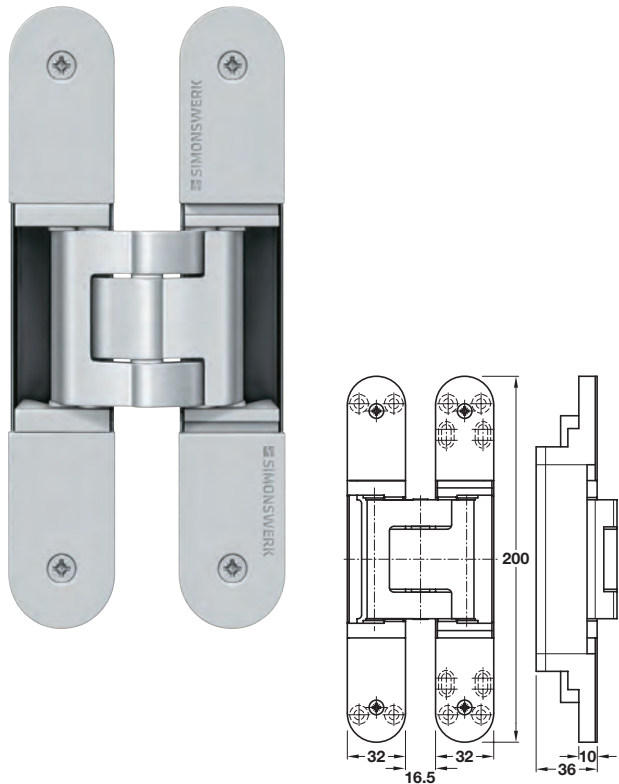

Finish	Cat. No.
Matt nickel (f2) powder coated	924.17.222
Satin stainless steel effect	924.17.204
Matt chrome (f1) powder coated	924.17.221
Polished nickel plated	924.17.270
Polished brass plated	924.17.281
Bronze metallic	924.17.250
Matt black	924.17.237



TECTUS TE 540 3D FR is also available with intumescent built in to hinge body, FD 30 fire rated, shown on page 91

Intumescent kit to suit TECTUS 540 3D hinges

- > Upgrades hinge to 30 minute fire rating
- > Intumescent material, white, 2 mm thick
- > Order qty: 1 set

Item	Cat. No.
Intumescent kit	924.19.132

Door and frame template set for TECTUS TE 540 3D hinge

- > For routing the hinge recess for TECTUS TE 540 3D
- > Aluminium
- > Order qty: 1 set

Suitable for	Set includes templates	Cat. No.
TECTUS TE 540 3D	for steps 1 and 2	924.17.629