



TECTUS TE 541 3D FVZ hinge



- > Maximum adjusted door weight 100 kg
- > 3-way adjustment:
Vertical: ± 3 mm
Horizontal: ± 3 mm
Depth: ± 1.0 mm
- > For wooden, steel or aluminium frames, for flush doors
- > For min. door thickness 28/32 mm
- > FVZ = 14 mm recessed frame facility
- > Allows for 14 mm cladding frame side
- > Maintenance free friction bearings
- > Suitable for left or right hand applications
- > Aluminium, zinc diecast and steel
- > Order qty: 1 pc

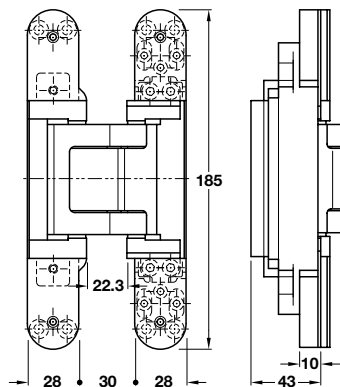

Finish	Cat. No.
Matt chrome	924.19.019
Matt nickel	924.19.096
Stainless steel effect	924.19.010
Polished nickel	924.19.097
Polished brass plated	924.19.018
Bronze metallic	924.19.015
Matt black	924.19.012

Intumescent kit to suit TECTUS 541 3D FVZ hinges

- > Upgrades hinge to 30 minute fire rating
- > Intumescent material, white, 2 mm thick
- > Order qty: 1 set

Item	Cat. No.
Intumescent kit	924.19.130