



TECTUS TE 640 3D hinge



- > Maximum adjusted door weight 200 kg
- > Opening angle 180°
- > 3-way continuous adjustment:
 - Vertical: ± 3 mm
 - Horizontal: ± 3 mm
 - Depth: ± 1 mm
- > For wooden, steel or aluminium frames, for flush doors
- > For min. door thickness 32 mm
- > Suitable for left or right hand applications
- > Maintenance free friction bearings
- > Aluminium, zinc diecast and steel
- > Order qty: 1 pc

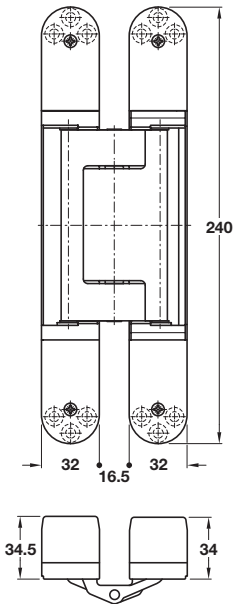

Installation

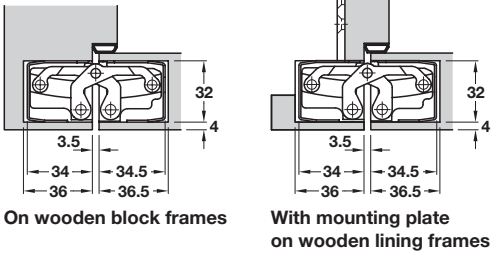

Finish	Cat. No.
Matt chrome	924.17.421
Matt nickel	924.17.422
Stainless steel effect	924.17.404
Polished nickel	924.17.469
Polished brass plated	924.17.481
Bronze metallic	924.17.450
Matt black	924.17.437



TECTUS TE 640 3D FR is also available with intumescent built in to hinge body, FD 30 fire rated, shown on page 92

Intumescent fire kit to suit TECTUS TE 640 3D

- > Upgrades hinge to 30 minute fire rating
- > Intumescent material, white, 2 mm thick
- > Order qty: 1 set

Item	Cat. No.
Intumescent kit	924.19.133

TOH AH 2019, © Hafele U.K. Ltd 2019. Dimensional data not binding. We reserve the right to alter specifications without notice.