



TECTUS TE 540 3D A8 hinge

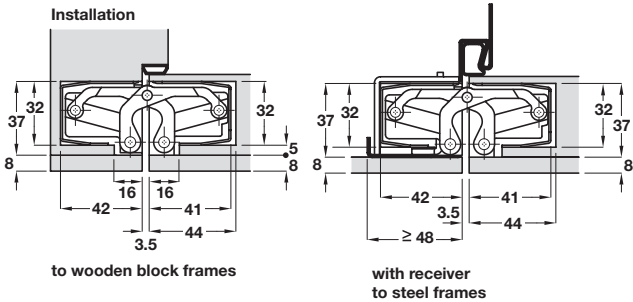

- > Maximum adjusted door weight 100 kg
- > 3-way continuous adjustment
  - Vertical: ± 3 mm
  - Horizontal: ± 3 mm
  - Depth: ± 1 mm
- > For wooden, steel or aluminium frames, for flush doors
- > For min. door thickness 40 mm (min. 44 mm with intumescent kit)
- > Allows for 8 mm cladding fitted to door and frame facings
- > Suitable for left and right hand applications
- > Maintenance free friction bearings
- > Aluminium, zinc diecast and steel
- > Order qty: 1 pc

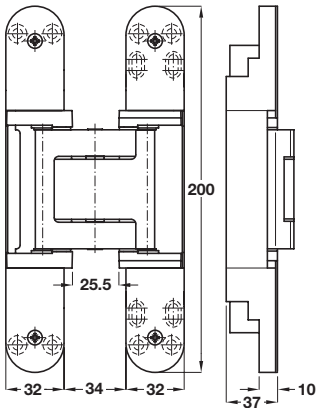

| Finish                         | Cat. No.   |
|--------------------------------|------------|
| Matt nickel (F2) powder coated | 924.17.322 |
| Satin stainless steel effect   | 924.17.304 |
| Polished nickel plated         | 924.17.370 |
| Matt chrome                    | 924.17.321 |
| Polished nickel                | 924.17.369 |
| Polished brass plated          | 924.17.300 |
| Bronze metallic                | 924.17.350 |
| Matt black                     | 924.17.337 |

Door and frame template set for TECTUS TE 540 3D A8 hinge

- > For routing the hinge recess for TECTUS TE 540 3D A8
- > Composite material
- > Order qty: 1 set

| Suitable for        | Set includes templates | Cat. No.   |
|---------------------|------------------------|------------|
| TECTUS TE 540 3D A8 | for steps 1, 2 and 3   | 924.17.627 |



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.