



TECTUS TE 640 3D A8 FR hinge



- > Maximum adjusted door weight 160 kg
- > 3-way continuous adjustment:
 - Vertical: ± 3 mm
 - Horizontal: ± 3 mm
 - Depth: ± 1.0 mm
- > FD 30 fire rated
- > Intumescent built in to hinge body
- > For wooden, steel or aluminium frames, for flush doors
- > Allows for 8 mm cladding fitted to door and frame facings
- > For min. door thickness 40 mm
- > Maintenance free friction bearings
- > Suitable for left or right hand applications
- > Aluminium, zinc diecast and steel
- > Order qty: 1 pc

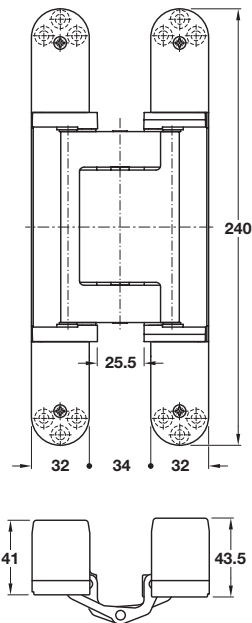

Installation

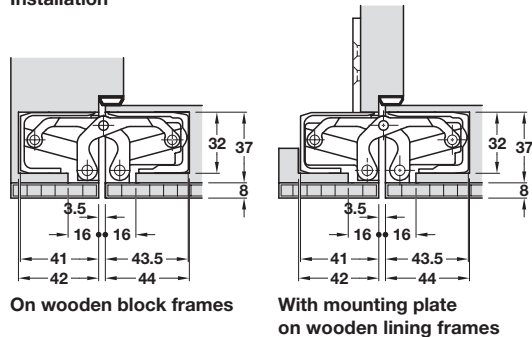

924.19.419 REPLACED BY **924.17.419**
 924.19.417 REPLACED BY **924.17.417**
 924.19.418 REPLACED BY **924.17.418**
 924.19.411 REPLACED BY **924.17.411**
 924.19.413 REPLACED BY **924.17.413**



Finish	Cat. No.
Satin chrome	924.17.414
Matt nickel	924.17.416
Satin stainless steel effect	924.17.419
Polished nickel	924.17.417
Polished brass plated	924.17.418
Bronze metallic	924.17.411
Matt black	924.17.413



Most of the products you will find in this Directory are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.

PAGE AMENDED
09.12.20/3

SALES DEPARTMENT 0800 171 2909

TECHNICAL SUPPORT 0800 171 2908