



TECTUS TE 240 3D Energy hinge

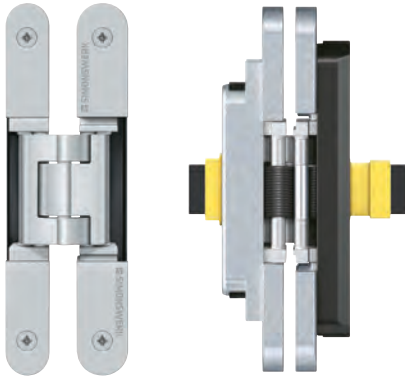


- > With permanent energy transfer
- > Maximum adjusted door weight 60 kg
- > 3-way continuous adjustment:
 - Vertical: ± 3 mm
 - Horizontal: ± 3 mm
 - Depth: ± 1.5 mm
- > For wooden, steel or aluminium frames, for flush doors
- > For min. door thickness 40 mm
- > Maintenance free friction bearings
- > Suitable for left or right hand applications
- > Aluminium, zinc diecast and steel
- > Order qty: 1 pc

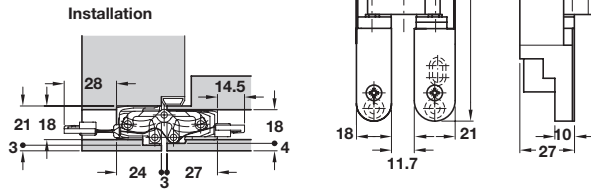


Finish	Cat. No.
Matt chrome	924.17.444
Matt nickel	924.17.446
Satin stainless steel effect	924.17.440

TECTUS TE 340 3D Energy hinge

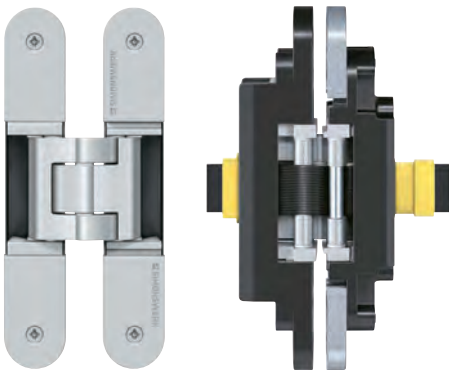

- > With permanent energy transfer
- > Maximum adjusted door weight 80 kg
- > 3-way continuous adjustment:
 - Vertical: ± 3 mm
 - Horizontal: ± 3 mm
 - Depth: ± 1.0 mm
- > For wooden, steel or aluminium frames, for flush doors
- > For min. door thickness 40 mm
- > Maintenance free friction bearings
- > Suitable for left or right hand applications
- > Aluminium, zinc diecast and steel
- > Order qty: 1 pc

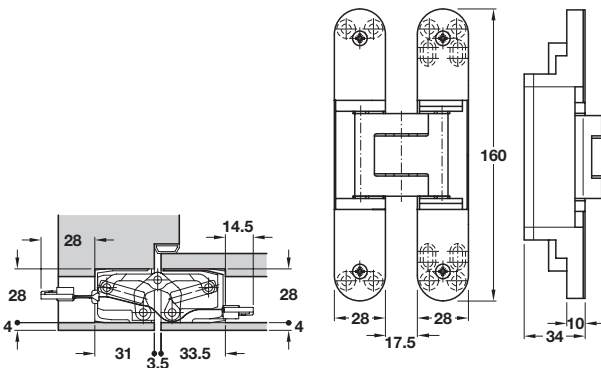

FD 30 fire rated when installed with intumescent kit Cat. No. 924.17.197, shown on page 81

Finish	Cat. No.
Matt chrome	924.17.734
Matt nickel	924.17.736
Satin stainless steel effect	924.17.245



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.