



TECTUS TE 526 3D Energy hinge

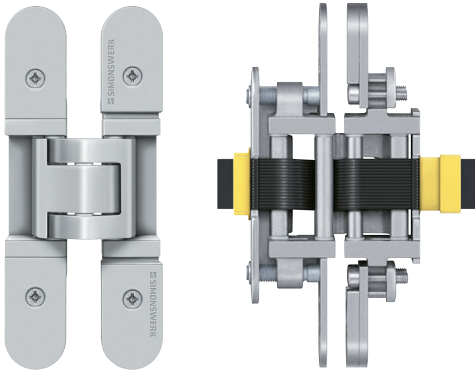

- > With permanent energy transfer
- > Maximum adjusted door weight 120 kg
- > 3-way continuous adjustment:
 - Vertical: ± 3 mm
 - Horizontal: ± 3 mm
 - Depth: ± 1.0 mm
- > For wooden, steel or aluminium frames, for flush doors
- > For min. door thickness 40 mm
- > Maintenance free friction bearings
- > Suitable for left or right hand applications
- > Grade 304 stainless steel
- > Order qty: 1 pc

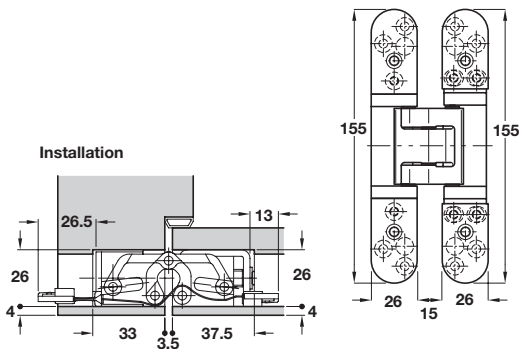


FD 60 fire rated when installed with intumescent kit Cat. No. 924.17.697, shown on page 83




Finish	Cat. No.
Satin stainless steel	924.16.800

TECTUS TE 527 3D Energy hinge

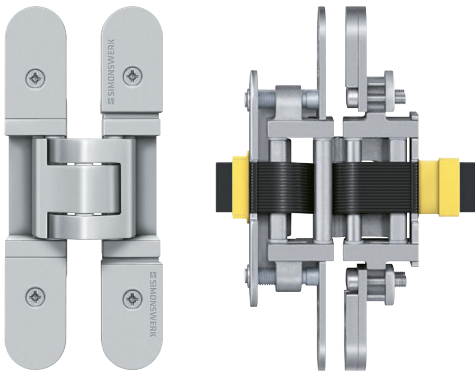

- > With permanent energy transfer
- > Maximum adjusted door weight 120 kg
- > 3-way continuous adjustment:
 - Vertical: ± 3 mm
 - Horizontal: ± 3 mm
 - Depth: ± 1.0 mm
- > For wooden, steel or aluminium frames, for flush doors
- > For min. door thickness 40 mm
- > Maintenance free friction bearings
- > Suitable for left or right hand applications
- > Mild steel
- > Order qty: 1 pc

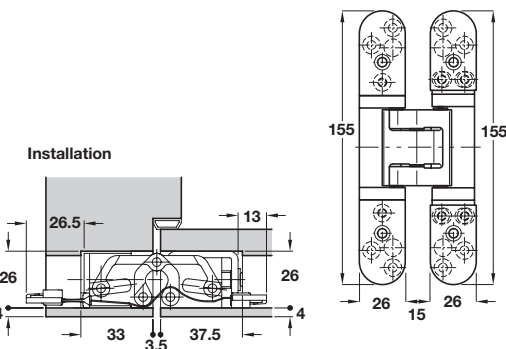

FD 60 fire rated when installed with intumescent kit Cat. No. 924.17.697, shown on page 83



Finish	Cat. No.
Matt chrome	924.19.032
Matt nickel	926.19.036
Satin stainless steel	924.16.805



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.

PAGE AMENDED
225.10.22/3