

Geze TS 4000 S overhead door closer



- > Power size 2-6
- > Max. door width 1400 mm
- > Adjustable closing force, optical strength indicator, backcheck hydraulic latching action and delayed closing action
- > Fig 1, Fig 61 and Fig 66 application
- > Aluminium body, mild steel arm
- > *Electro plated mild steel cover (not suitable for external use)
- > Approved CF 252 certfire
- > CE marked
- > Tested in accordance with BS EN 1154:1997
- > Order qty: 1 pc


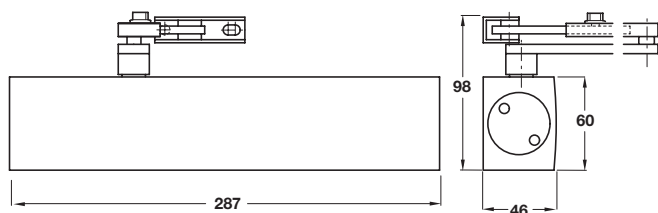


Fig 1 Standard application
(door leaf installation)
Closer is fixed to the
pull side of the door




Fig 61 Transom application
(overhead installation)
Closer is fixed to the
push side of the door




Fig 66 Parallel arm
application: Closer is fixed
to the push side of the door
using fixing bracket

BS EN 1154

4	8	2-6	1	1	4
---	---	-----	---	---	---



Finish	Cat. No.
Silver	940.13.319
Satin stainless steel*	940.13.310 



RAL colours and copper finishes are also available to order on request - please contact us for further information



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.