


BRITON OVERHEAD DOOR CLOSERS

These Briton door closers include adjustable closing speed and latch action, with power sizes from 2 to 4.

Briton 1110-SES overhead door closer

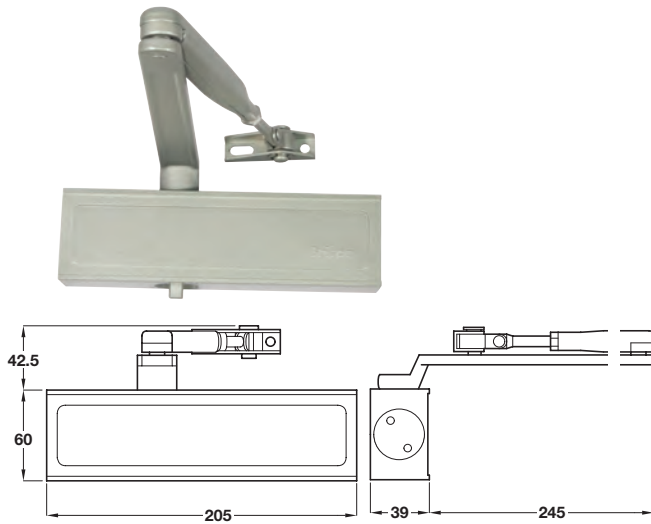

- > Power size 2-4
- > Max. door width 1100 mm
- > Adjustable closing speed and latch action
- > Fig 1, Fig 61 and Fig 66 application
- > CE marked
- > Tested in accordance with BS EN 1154:1997
- > Tested in accordance with BS EN 1634-1
- > Cast aluminium body, mild steel arm
- > Order qty: 1 pc

BS EN 1154

3	8	2-4	1	1	4
---	---	-----	---	---	---




Fig 1 Standard application
(door leaf installation)
Closer is fixed to the pull side of the door

Fig 61 Transom application
(overhead installation)
Closer is fixed to the push side of the door

Fig 66 Parallel arm application: Closer is fixed to the push side of the door using fixing bracket

Finish	Cat. No.
Silver	931.60.609

Briton 20003E overhead door closer

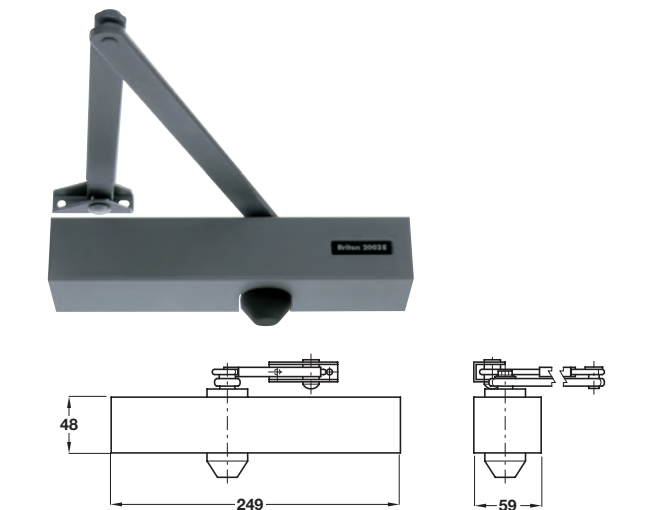

- > Power size 3
- > Max. door width 950 mm
- > Adjustable closing speed and latch action
- > Fig 1, Fig 61 and Fig 66 application
- > CE marked
- > Tested in accordance with BS EN 1154:1997
- > Cast aluminium body, mild steel arm
- > Order qty: 1 pc

BS EN 1154

4	8	3	1	1	3
---	---	---	---	---	---



Fig 1 Standard application
(door leaf installation)
Closer is fixed to the pull side of the door

Fig 61 Transom application
(overhead installation)
Closer is fixed to the push side of the door

Fig 66 Parallel arm application: Closer is fixed to the push side of the door using fixing bracket

Finish	Cat. No.
Silver powder coated	931.92.009



A door stop should always be used for non backchecked doors, and where practical for backchecked doors, and at least 66% of the door width away from the hinge. Door stops are shown in **Section 2** from page **63**