

DORMA OVERHEAD DOOR CLOSERS

These Dorma door closers have adjustable closing speed and latch action, with power sizes from 3 to 4.


Dorma TS68 overhead door closer



- > Power size 3-4
- > Max. door width 1100 mm
- > Max. door weight 80 kg
- > Adjustable closing speed and latch action
- > Only suitable for Pull side (Fig 1) applications only for timber fire doors
- > CE marked and Certifire accredited CF 268
- > Tested in accordance with BS EN 1634:1
- > Tested in accordance with BS EN 1154:1997
- > Cast aluminium body, steel arm assembly
- > Order qty: 1 pc



TS68 is tested on timber intumescent sealed door assemblies and has a fire resistance of up to 120 minutes
Not approved for use on steel fire doors

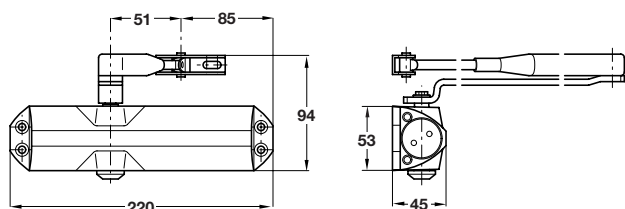

BS EN 1154

3	8	3-4	1	1	2
---	---	-----	---	---	---



certifire



Finish	Cat. No.
Silver sprayed	931.07.059
Gold sprayed	931.07.058 


Dorma TS 71 overhead door closer



- > Power size 3-4
- > Max. door width 1100 mm
- > Adjustable closing speed and latch action
- > Only Fig 1 pull face and Fig 6. (parallel arm) push side approved
- > CE marked and Certifire accredited CF 268
- > Tested in accordance with BS EN 1154:1997
- > Aluminium body, mild steel arm
- > Order qty: 1 pc



TS71 is tested on timber intumescent sealed door assemblies with timber frames or insulated steel frames and has a fire resistance of up to 120 minutes

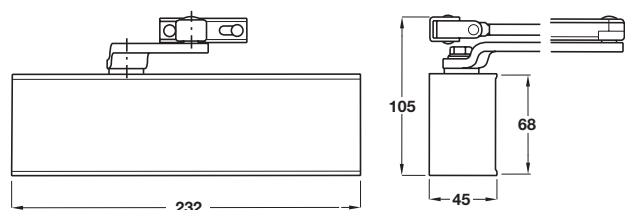

BS EN 1154

4	8	3-4	1	1	2
---	---	-----	---	---	---



certifire



Finish	Cat. No.
Silver	931.07.709



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.

PAGE AMENDED
08.03.22/1