

OVERHEAD DOOR CLOSERS

These door closers have adjustable closing speed and latch action, with power sizes from 3 to 4.

Rack and pinion overhead door closer EN2-4



- > Power size 2-4, adjustable by template
- > Max. door width 1100 mm
- > Universal application (Fig 1, Fig 6)
- > Max. door weight 80 kg pull side, 60 kg push side
- > Adjustable closing speed and latch action
- > Rack and pinion cast body closer with matching armset
- > CE marked and Certifire accredited CF 5294
- > Tested in accordance with BS EN 1634:1 - suitable for up to 2 hours on timber door sets
- > Tested in accordance with BS EN 1154:1996
- > Cast aluminium body, steel arm assembly
- > CW matching parallel arm bracket
- > Order qty: 1 pc



EN 1634-1 tested on timber intumescent sealed door assemblies and has a fire resistance of up to 120 minutes
Not approved for use on steel fire doors

BS EN 1154 (Fig. 1)

3 8 4-2 1 1 3

BS EN 1154 (Fig. 6)

3 8 3 1 1 3



certifire




Finish

Cat. No.

Silver sprayed

931.31.000

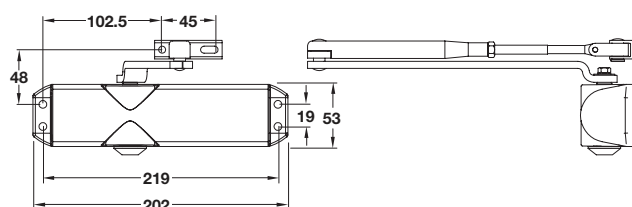

V-Arm overhead door closer EN2-4 with semi-radius cover



- > Power size 2-4 mechanism with flat form armset
- > Max. door width 1100 mm (Fig. 1 EN2-4)
- > Max. door width 950 mm (Fig. 6 EN3)
- > Adjustable closing speed and latch action
- > Rack and pinion mechanism with flat form armset
- > Only Fig 1 pull face and Fig 6. (parallel arm) push side approved
- > CE marked and Certifire accredited CF 5294
- > Tested in accordance with BS EN 1634:1 - suitable for up to 2 hours on timber door sets
- > Tested in accordance with BS EN 1154:1996
- > Cast aluminium body, mild steel arm, cover: genuine stainless steel (only applies to stainless steel model), semi radius design
- > Order qty: 1 pc



EN 1634-1 is tested on timber intumescent sealed door assemblies with timber frames and has a fire resistance of up to 120 minutes

BS EN 1154 (Fig. 1)

3 8 4-2 1 1 3

BS EN 1154 (Fig. 6)

3 8 3 1 1 3



certifire



Finish



Cat. No.

Satin stainless steel

931.31.001

Silver sprayed

931.31.002

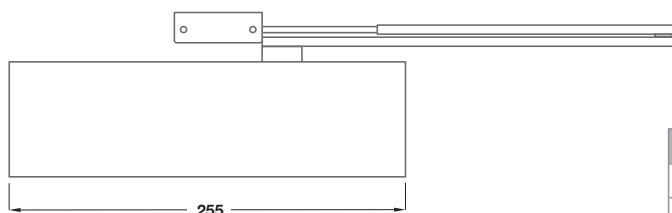

Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.