



Cam action door closer pull with guide rail EN2-4 "pull-side" with semi-radius cover

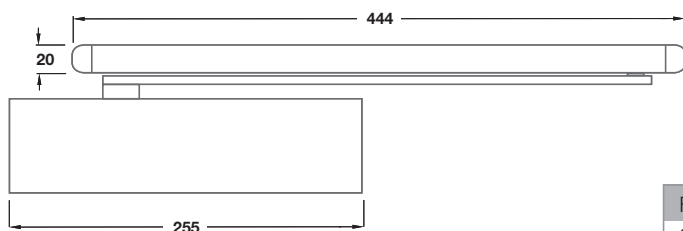

- > Cam action spring adjustable door closer EN2-4 with slide arm
- > For door mount pull side & transom mount push side mounting
- > Adjustable closing speed and latch action
- > Adjustable backcheck
- > Min. door width 833mm to meet ADM at EN3 (850mm push side)
- > Maximum door width 1100mm (shown with semi-radius cover)
- > Tested and approved to BS EN1154:1996 Class 4/8/4-2/1/1/3
- > CE and UKCA marked and Certifire approved CF 5312
- > Capable of meeting opening force requirements for BS8300
- > EN 1634-1 tested - Suitable for upto 2 hours on timber door sets
- > EPD Verified as per ISO 14025 and EN 15804+A2
- > Performance guarantee: 25 years
- > Order qty: 1 pc



BS EN 1154

4	8	4-2	1	1	3
---	---	-----	---	---	---





Finish	Cat. No.
Satin stainless steel	931.31.012

Cam action door closer push with guide rail EN2-4 "push-side" with semi-radius cover



- > Cam action spring adjustable door closer EN2-4 with slide arm
- > For door mount push side & transom mount pull side mounting
- > Adjustable closing speed and latch action
- > Adjustable backcheck
- > Min. door width 870mm to meet ADM at EN3 (873mm push side)
- > Maximum door width 1100mm (shown with semi-radius cover)
- > Tested and approved to BS EN1154:1996 Class 3/8/4-2/1/1/3
- > CE and UKCA marked and Certifire approved CF 5312
- > Capable of meeting opening force requirements for BS8300
- > EN 1634-1 tested - Suitable for upto 2 hours on timber door sets
- > EPD Verified as per ISO 14025 and EN 15804+A2
- > Performance guarantee: 25 years
- > Cover design semi-radius
- > Order qty: 1 pc

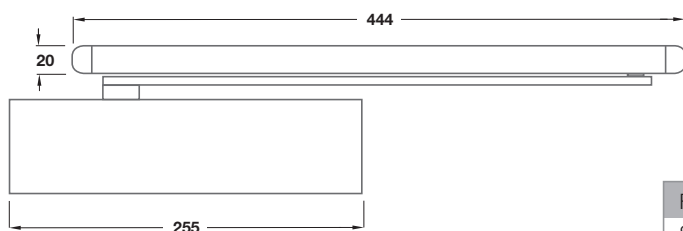

BS EN 1154

3	8	4-2	1	1	3
---	---	-----	---	---	---



Finish	Cat. No.
Satin stainless steel	931.31.013