


OVERHEAD DOOR CLOSERS

These door closers include variable closing force, latch action and backcheck, with power sizes from 2 to 4.

Overhead door closer, power size 3

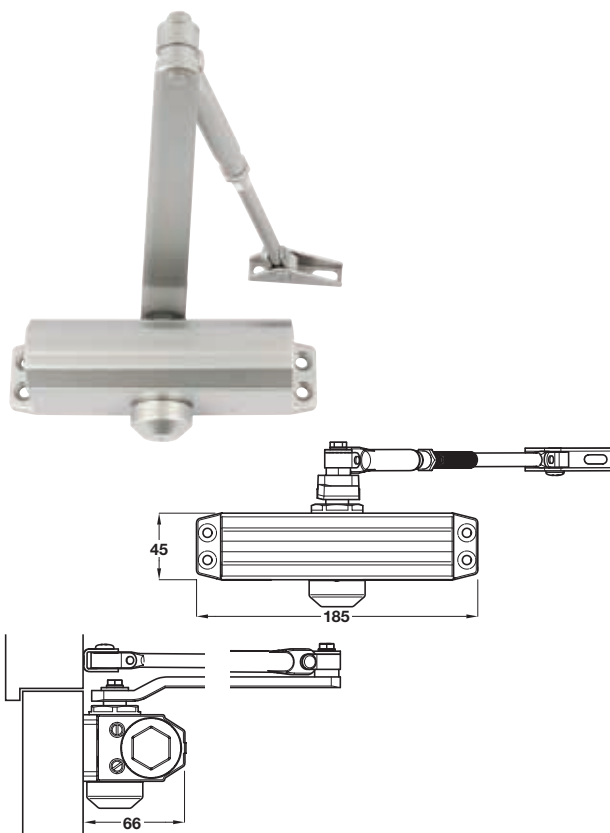

- > Power size 3
- > Maximum door size 2100 x 950 mm
- > Maximum door weight 60 kg
- > Closing and latch speed adjustable
- > Fig 1 (pull side only) application
- > Parallel arm configuration (Fig 6) not suitable for fire door applications
- > FD30 and FD60 fire doors (Fig. 1 only)
- > Certifire certificate No. CF600
- > CE marked
- > Tested in accordance with BS EN 1634-1
- > Tested in accordance with BS EN 1154:1997
- > Order qty: 1 pc

BS EN 1154

3	8	3	1	1	3
---	---	---	---	---	---

Fig 1 only

10 Year
Warranty

certifire

Fixings
included


Finish

Cat. No.

Silver sprayed

931.58.019

Overhead door closer, power adjustable size 2-4

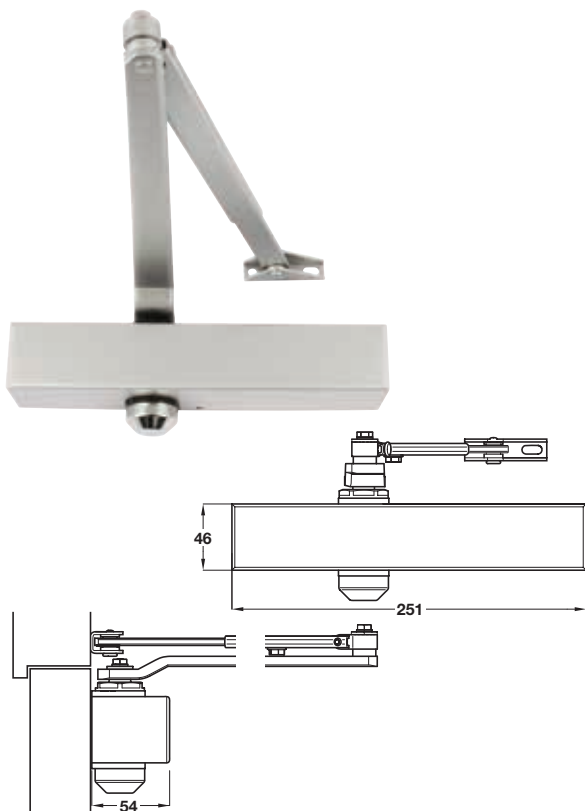

- > Power adjustable size 2-4
- > Maximum door size 2100 x 1100 mm
- > Maximum door weight 80 kg
- > Closing and latch speed adjustable
- > Adjustable back check and delayed action
- > Fig 1 (pull side only) application
- > FD30 and FD60 fire doors (Fig. 1 only)
- > Certifire certificate No. CF600
- > CE marked
- > Tested in accordance with BS EN 1634-1
- > Tested in accordance with BS EN 1154:1997
- > Order qty: 1 pc

BS EN 1154

4	8	4-3	1	1	3
---	---	-----	---	---	---

10 Year
Warranty

certifire

Fixings
included

Finish

Cat. No.

Silver

931.58.009