



Startec DCL 34 concealed overhead door closer

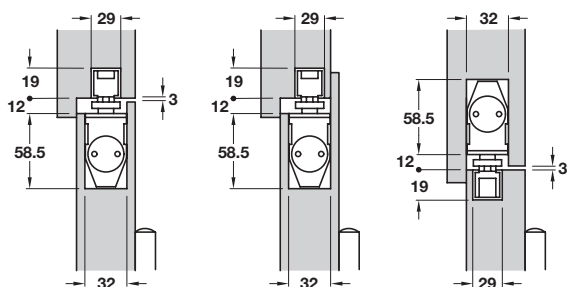

- > Power size 3
- > Max. door width 950 mm
- > Min. door thickness 40 mm
- > Opening angle 120°
- > Variable closing force and latch action
- > Suitable for standard installation in door and overhead installation in frame
- > CE marked
- > Tested in accordance with BS EN 1154:1997
- > Cast aluminium body
- > Order qty: 1 pc

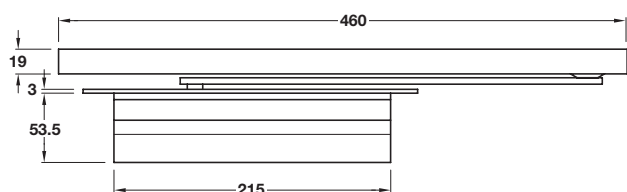

BS EN 1154

3 8 3 1 1 3




Finish	Cat. No.
Silver coloured	931.84.049

Intumescent fire protection kit for DCL concealed door closers



- > Mono-Ammonium Phosphate (Interdens® MAP) material
- > For concealed door closer and rail
- > Self-adhesive backing
- > Tested in accordance with BS EN 1634-1 and BS 476: part 22 1987
- > Colour: White
- > Order qty: 1 pc



950.11.123 REPLACED BY **931.14.980/1**
950.11.124 REPLACED BY **931.14.982/3**



Door closer model	Fire rating	Thickness	Cat. No.
DCL 33	FD 30	1 mm	931.14.980
DCL 33	FD 60/90	2 mm	931.14.981
DCL 34	FD 30	1 mm	931.14.982
DCL 34	FD 60/90	2 mm	931.14.983

PAGE AMENDED
14.09.23/3

SALES DEPARTMENT 0800 171 2909

TECHNICAL SUPPORT 0800 171 2908