



GEZE FLOOR SPRINGS

Floor spring to suit double action doors, with adjustable closing force and speed and backcheck.

Geze TS 550 NV FP floor spring mechanism and box, power size 3-6



- > Floor spring mechanism to suit double action doors up to 1400 mm wide with flat-tapered, removable interlocked spindle
- > Suitable for use on fire and smoke doors
- > Without hold open
- > Closing force size 3-6 - an advantage with wind loads or heavy door leaves
- > Maximum door width 1400 mm
- > Maximum door weight 300 kg
- > End stop and closing speed adjustable
- > For double action only; the opening angle is limited to approx 140° in either direction before the door fouls the frame
Closing from fully open to 80° including delayed action / 80-0° / 15-0° (latch action)
- > All settings accessible from above and convenient to implement whilst installed
- > Durability tested in over 500,000 opening and closing cycles
- > Adjustable closing force, fixed backcheck
- > Safety valve prevents overloading
- > Supplied with cement box - adjustable position (6 mm vertical, 10 mm lateral and 10 mm length)
- > CE marked
- > Tested in accordance with BS EN 1154:1997
- > Approved Certifire certificate no. CF 259
- > Order qty: 1 set

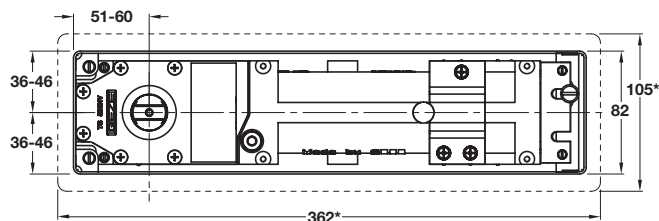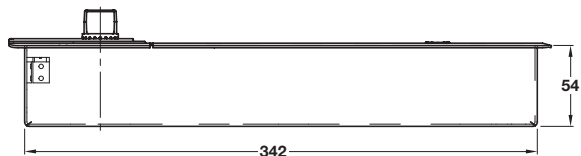

* Dimensions for cover plate (not included - must be ordered separately)

BS EN 1154

3 8 3-6 1 1 4

certifire



Version	Cat. No.
Without hold open	932.10.180



- > Order cover plate Cat. No. 932.10.130 separately, shown on page 46
- > Order pivot fittings separately, shown on page 46-47
- > 180° degree for single action only is available on request - please contact us for further information

PAGE AMENDED
21.10.22/5