


Geze TS 500 NV Floor spring mechanism and box, power size 1-4

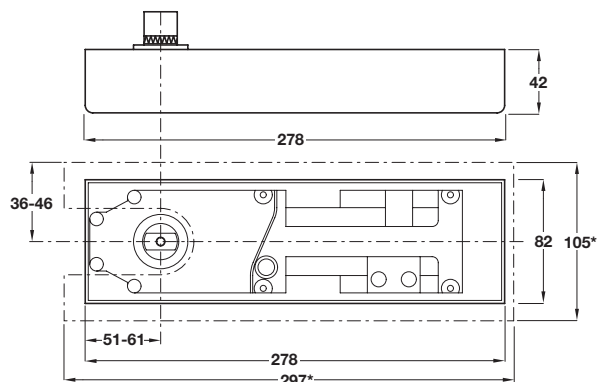

* Dimensions for cover plate (not included - must be ordered separately)

- > Floor spring mechanism to suit single and double action doors up to 1100 mm wide with flat-tapered, removable interlocked spindle
- > Closing force size 1-4
- > Maximum door width 1100 mm
- > Maximum door weight 150 kg
- > Closing range from 170° for single action applications
- > Adjustable closing force, adjustable closing speed, fixed backcheck and latch action and hold open version
- > Supplied with cement box - adjustable position (6 mm vertical, 10 mm lateral and 10 mm length)
- > Safety valve prevents overloading
- > Hold open @ 90° (single action only)*, not fire doors
- > *For double action doors each hold-open angle is 5° greater. For example, an 85° hold-open version will be 90° in double action mode
- > Approved CF 259 certifiere, standard version only
- > CE marked
- > Tested in accordance with BS EN 1154:1997
- > Order qty: 1 pc

BS EN 1154

932.10.050

3	8	1-4	1	1	4
---	---	-----	---	---	---


932.10.052

3	8	1-4	0	1	4
---	---	-----	---	---	---



Version	Cat. No.
Standard (EN size 1-4)	932.10.050
Hold-open version 90°	932.10.052*

Geze TS 550 NV Floor spring mechanism and box, power size 3-6

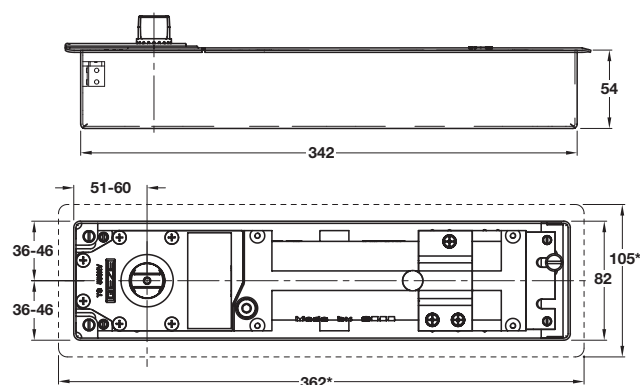

* Dimensions for cover plate (not included - must be ordered separately)

- > Floor spring mechanism to suit single and double action doors up to 1400 mm wide with flat-tapered, removable interlocked spindle
- > Not suitable for use on fire doors
- > Closing force size 3-6
- > Maximum door width 1400 mm
- > Maximum door weight 300 kg
- > Closing range from 175° for single action applications
- > Adjustable closing force, adjustable closing speed, fixed backcheck and variable hold-open, engageable/disengageable 80-120°
- > Supplied with cement box - adjustable position (6 mm vertical, 10 mm lateral and 10 mm length)
- > Safety valve prevents overloading
- > Flexible adjustable closing speed for 170-80° with two functions:
Open - closing speed 170-80°
Variable hold open 120-80°
- > CE marked
- > Tested in accordance with BS EN 1154:1997
- > Order qty: 1 pc

BS EN 1154

3	8	3-6	0	1	4
---	---	-----	---	---	---



Version	Cat. No.
Standard: Selectable hold-open version	932.10.061



- > Order cover plate Cat. No. 932.10.130 separately, shown on page 46
- > Order pivot fittings separately, shown on pages 46-47

PAGE AMENDED
12.07.21/1