


Double action pivot set, frame mounted




- > Allows doors to swing in either direction
- > Door plates radiused for easy preparation
- > Bottom bracket is frame mounted
- > For medium duty internal doors
- > Minimum door thickness 44 mm
- > To suit doors up to 80 kg, when bracket floor mounted
- > Maximum door width 1100 mm, when jamb mounted
- > 44 mm thick doors require R9 radius on pivot edge, 54 mm thick doors require R15 radius
- > Top and bottom plates have maintenance free oil impregnated bronze bearings
- > Set includes door bottom pivot, top centre and Ø 5 mm screws to suit
- > Maintenance free
- > Tested in accordance with BS EN 1634-1
- > Grade 304 stainless steel
- > Order qty: 1 pc

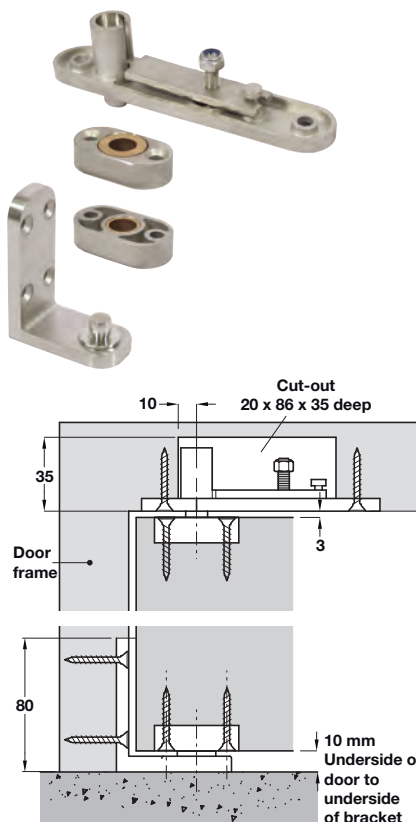

Finish	Cat. No.
Satin stainless steel	932.87.030

Double action pivot set, floor mounted

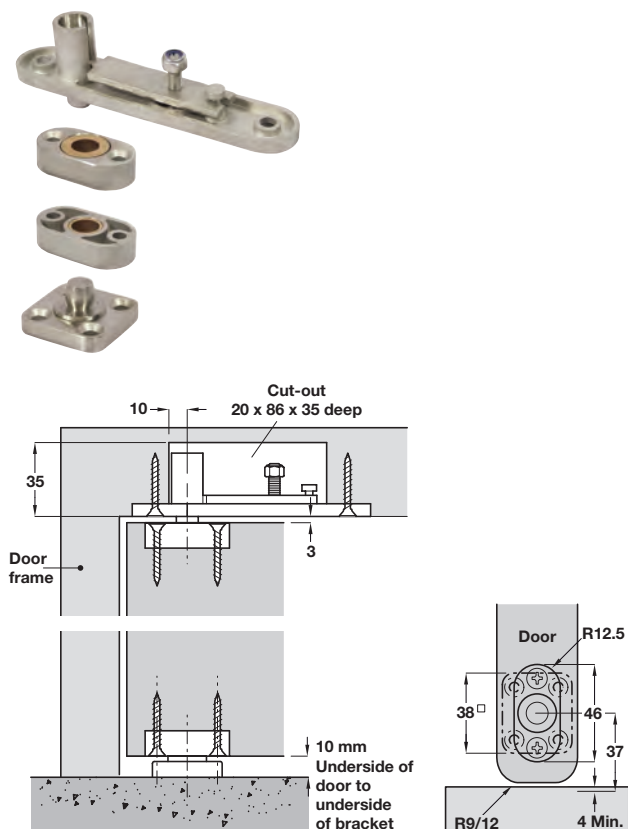

- > Allows door to swing in either direction
- > Door plates radiused for easy preparation
- > Bottom bracket is floor mounted and does not protrude beyond the door edge
- > Minimum door thickness 44 mm
- > To suit doors up to 80 kg
- > Maximum door width 1100 mm
- > Top and bottom plates have maintenance free oil impregnated bronze bearings
- > 44 mm thick doors require R9 radius on pivot edge, 54 mm thick doors require R15 radius
- > Set includes door bottom pivot, top centre and Ø 5 mm door brackets
- > Maintenance free
- > Tested in accordance with BS EN 1634-1
- > Grade 304 stainless steel
- > Order qty: 1 pc



Finish	Cat. No.
Satin stainless steel	932.87.040



It is recommended that both lock and hinge stiles are brush stripped for privacy; shown in **Section 2** on page **93**