


Double action pivot set, frame mounted




- > Allows doors to swing in either direction
- > Door plates radiused for easy preparation
- > Bottom bracket is frame mounted
- > Minimum door thickness 44 mm
- > To suit doors up to 80kg, when bracket floor mounted
- > Maximum door width 1100 mm, when jamb mounted
- > 44 mm thick doors require R9 radius on pivot edge, 54 mm thick doors require R15 radius
- > Top and bottom plates have maintenance free oil impregnated bronze bearings
- > Set includes door bottom pivot, top centre and Ø 5 mm door brackets
- > Maintenance free
- > Tested in accordance with BS EN 1634-1
- > Grade 304 stainless steel
- > Order qty: 1 pc

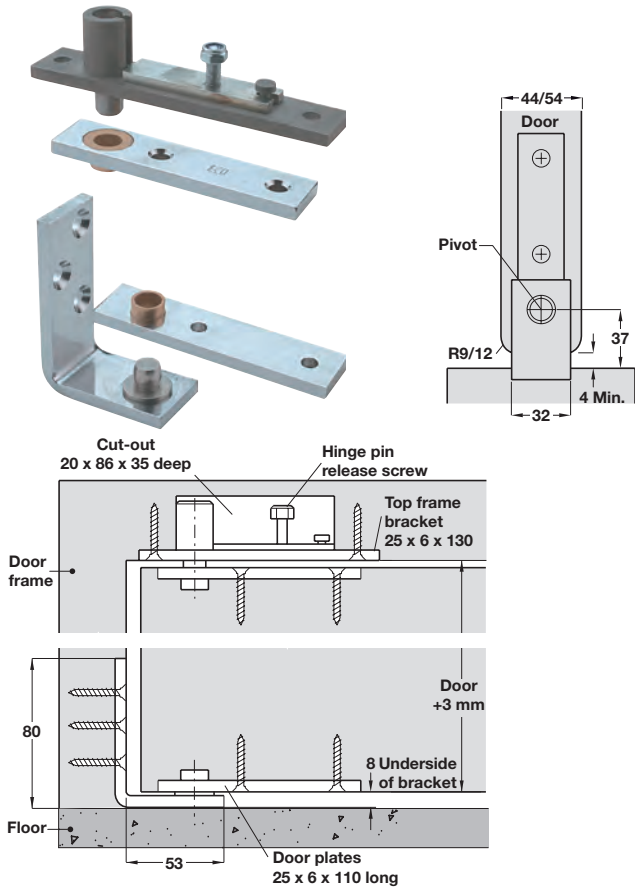

Finish	Cat. No.
Satin stainless steel	932.87.000

Double action pivot set, frame mounted

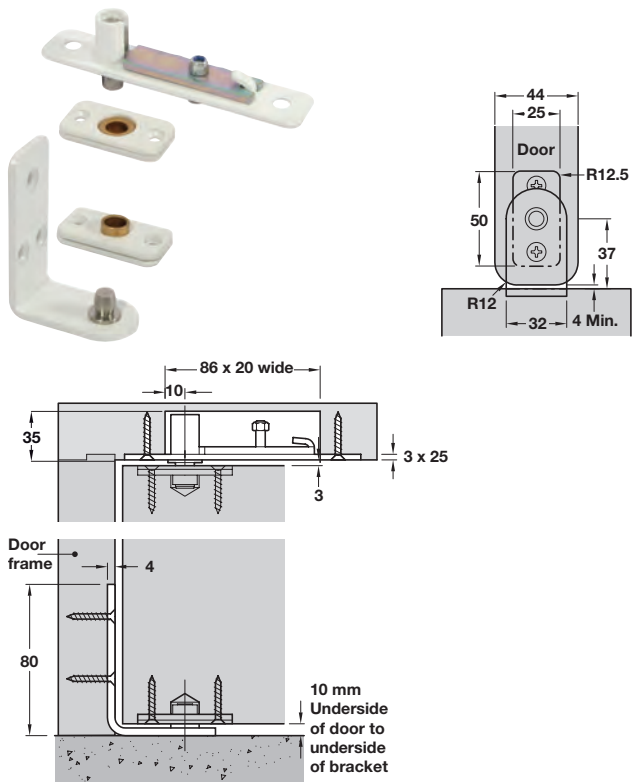

- > Allows doors to swing in either direction
- > Door plates radiused for easy preparation
- > Bottom bracket is frame mounted
- > For light duty internal doors
- > Minimum door thickness 38 mm
- > To suit doors up to 20 kg, when bracket frame mounted and up to 40 kg when bracket floor mounted
- > Maximum door width 950 mm, when jamb mounted
- > 38 mm thick doors require R21 radius on pivot edge
- > Top and bottom plates have maintenance free oil impregnated bronze bearings
- > Set includes door bottom pivot, top centre and Ø 5 mm screws to suit
- > Maintenance free
- > Mild steel
- > Order qty: 1 pc



Finish	Cat. No.
White powder coated	932.87.057



It is recommended that both lock and hinge stiles are brush stripped for privacy; shown in **Section 2** on page **93**