

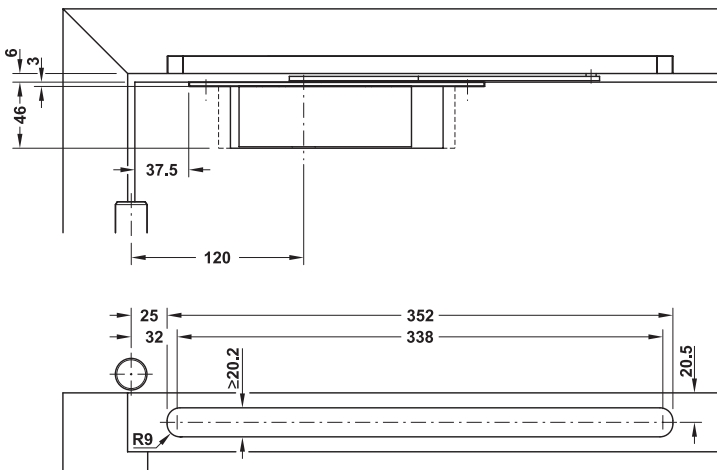


GEZE ActiveStop Soft and self closing mechanism for doors



Door frame preparation details

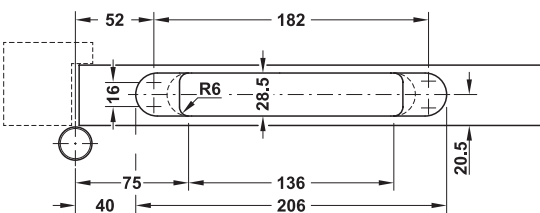

Door leaf preparation details

- > For butting or rebated wooden interior doors, for concealed installation in door leaf
- > Gentle stopping; brakes the swing upon opening and stops the door in the desired position
- > Silent closing; prevents loud banging with soft silent closure, minimising risk of injury
- > Keeps the door open to prevent it slamming without needing a separate door stop
- > Holding position can be set individually using the adjustable opening angle
- > Maintenance-free
- > Functionality:
 - Closing direction: Soft and self closing from approx. 25°
 - Opening direction: soft opening and slow pulling from approx. 60°
 - Door is securely held in open position
 - Free swing range between 25° and 60°
- > Door weight: Max. 45 kg
- > Door width: Max. 1100 mm
- > Door thickness: Min. 38 mm
- > Opening angle: Can be restricted continuously between 80° and 140°
- > Mounting: For DIN left and right hand use
- > Supplied with
 - 1 ActiveStop soft and self closing system for doors
 - 1 guide rail with glide and end buffer
 - 1 connecting arm
 - 1 universal door latchbolt blocking device Mounting material
- > Aluminium mechanism and guide rail, mild steel arm
- > Silver coloured finish



Cat. No.
ActiveStop soft and self closing system 931.19.170