


Geze TS 1500 overhead door closer



- > Power size 3-4
- > Max. door width 1100 mm
- > Adjustable closing speed and latch action
- > Fig 1, Fig 61 and Fig 66 application
- > Approved CF 144 certfire
- > CE marked
- > Tested in accordance with BS EN 1154:1997
- > Tested in accordance with BS EN 1634-1
- > Cast aluminium body, mild steel arm
- > *Electro-plated mild steel cover (not suitable for external use)
- > Order qty: 1 pc

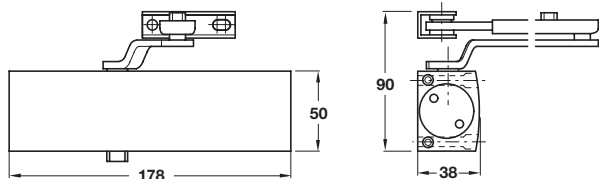

BS EN 1154

4	8	3-4	1	1	4
---	---	-----	---	---	---




Fig 1 Standard application
(door leaf installation)
Closer is fixed to the pull side of the door




Fig 61 Transom application
(overhead installation)
Closer is fixed to the push side of the door





Fig 66 Parallel arm application: Closer is fixed to the push side of the door using fixing bracket

Finish	Cat. No.
Silver	940.01.626
Black	931.16.603
Satin stainless steel*	931.16.850

Geze TS 2000V and TS 2000 VBC overhead door closer



- > Power size 2-5
- > Max. door width 1250 mm
- > Adjustable closing speed and latch action
- > TS 2000 VBC with backcheck
- > Fig. 1, Fig. 61 and Fig. 66 application
- > Approved CF 252 certfire
- > CE marked
- > Tested in accordance with BS EN 1154:1997
- > Cast aluminium body
- > Order qty: 1 pc

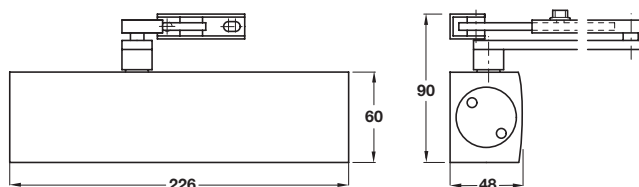

BS EN 1154

4	8	3-5	1	1	4
---	---	-----	---	---	---




Fig 1 Standard application
(door leaf installation)
Closer is fixed to the pull side of the door




Fig 61 Transom application
(overhead installation)
Closer is fixed to the push side of the door




Fig 66 Parallel arm application: Closer is fixed to the push side of the door using fixing bracket

Finish	TS 2000 V	TS 2000 VBC
Backcheck	without	with
Silver	940.13.706	940.25.106
Satin stainless steel	931.16.100	-



RAL colours and copper finishes are also available to order on request - please contact us for further information