


WTX 202 relay unit



- > Area of application: For extending the WT 210 wall terminal by 2 additional relays and 2 input ports
- > Version: Communication between the WTX 202 relay unit and the WT 210 wall terminal is encrypted with AES-128
- > Installation: For clipping onto top hat rail
- > Order qty: 1 pc

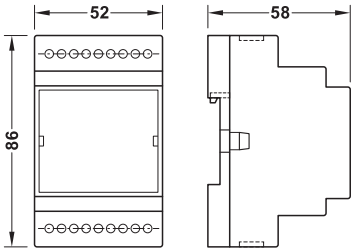

Cat. No.
WTX 202 relay unit 917.91.085


Energy control terminal for Diallock WT 200 / WT 220 / WT 210



White



Silver coloured

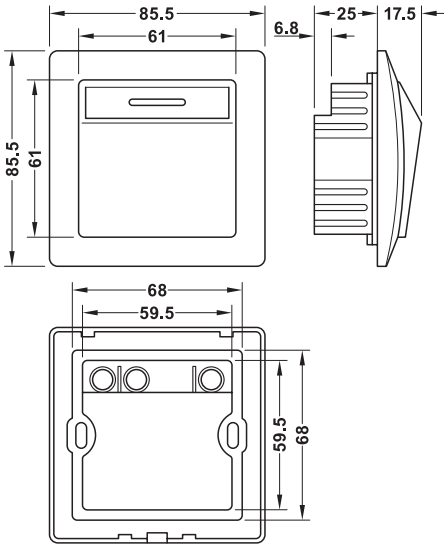

- > Application: Particularly suitable for use in hotels for activating electrical loads in guest rooms such as lighting, TV, sockets, air conditioning. Plastic housing white or silver coloured
- > Activation of electric circuits and switching of electrical devices by means of Diallock keys with ISO credit card size via integrated switching contact. Activation as long as transponder card is inserted in the holder of the energy control terminal. Every transponder card is authorised
- > The electric circuits and switches are deactivated 20 seconds after the transponder card has been removed
- > The LED (red) is only illuminated if no transponder is inserted in the holder
- > Supplied with:
1x energy control terminal with holder for transponder card
- > Order qty: 1 pc

Colour	Cat. No.
White	917.56.917
Silver coloured	917.56.919



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.