


ELECTRONIC LOCKING HARDWARE

Multipoint locking devices, electric strikes and electromagnetic locks.


Multiple locking device

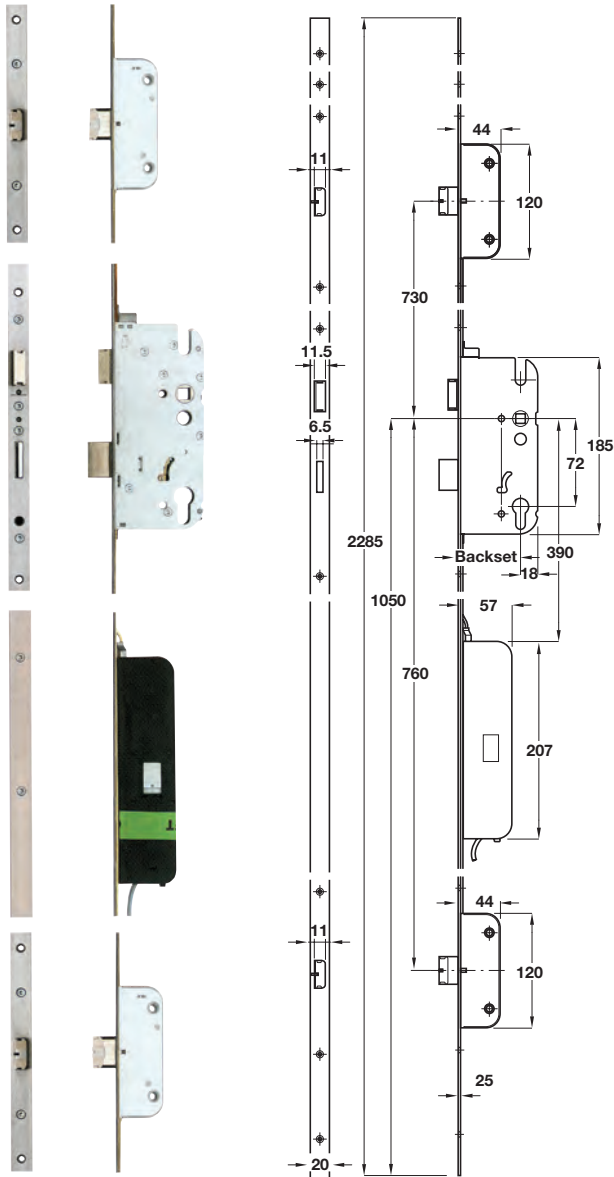

- > Suitable for timber, PVCu and aluminium doors
 - Suits either hand of door
 - To be used in conjunction with Dialock electronic or equal, control systems
 - To suit profile cylinders
 - Automatic latchbolts, lock automatically on closing the door
- > Technical data:
 - Backsets 55 mm and 65 mm
 - 10 mm square follower
 - Nominal voltage AC/DC - 12V 50Hz
 - Max. current - 1A
 - IP 40 rated
 - Extension speed - 16/20 mm/s
 - Max. carrying capacity - 70N
- > Opening and locking functions:
 - Automatic locking - latch bolts are automatically prelocked when door closes
 - Automatic release - from inside, by a sensor. Latch and automatic latch bolts are retracted at the same time. From outside, through the electronic control system. i.e. Dialock
 - Mechanical activation (always possible) - from inside, by activating the lever handle. From outside, by key
- > Components:
 - 1x Multiple locking device
 - 1x Connecting cable, approx 6 m
 - 1x Plug with bare ends
- > Galvanised steel lock case. Stainless steel forend. Nickel-plated zinc diecast latch and automatic latch bolt. Nickel-plated steel deadbolt. Zinc diecast follower
- > Backset versions 35 and 65 mm are available - information on request
- > Order fixing screws separately
- > Order qty: 1 set

Backset	Forend width	Cat. No.
55 mm	20 mm	911.49.065 

Multiple locking device accessories

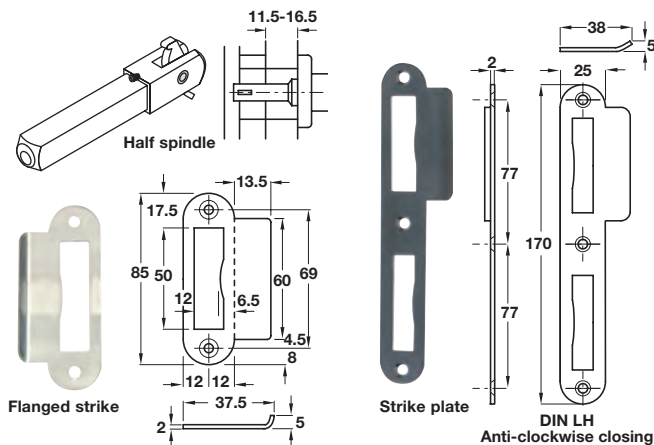

- > Order separately, for non-rebated wooden frames:
 - Half spindle, 8/10 x 60 mm
 - Flanged strike plate, lug angled, satin stainless steel
 - Lock strike plate, DIN left hand and DIN right hand, flat type, satin stainless steel
- > Order qty: See table below

Item	Order qty per lock	Cat.No.
Half spindle	1 pc	909.46.116 
Flanged strike	2 pcs	911.39.322 
Strike plate LH	1 pc DIN	911.39.007
Strike plate RH	1 pc DIN	911.39.008