


Current transmitter





- > For power transfer from door frame to door
- > Screw terminal for cable
- > Contact voltage: ≤ 12 V
- > Contacts can provide power when connected to any lock at 12 V using less than 1.5 A
- > Distance between contact blocks ≤ 5 mm
- > Brass contact pins, white plastic housing
- > CE marked
- > Order qty: 1 pc

ARTICLES REMOVED FROM PAGE
912.02.091 DISCONTINUED - REPLACED BY **912.02.138**
912.02.096 DISCONTINUED - REPLACED BY **912.02.139**

Connection	Cat. No.
2-pin	912.02.138
3-pin	912.02.139

Door loop, concealed

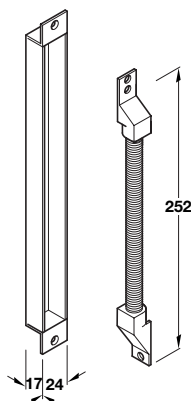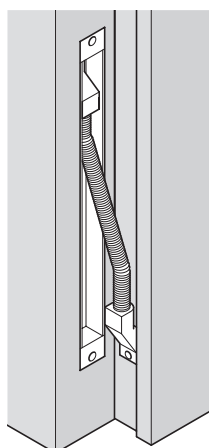

- > Allows hidden cable run between door and frame
- > Concealed from sight within door frame and door
- > Distance from hinge pin to door frame < 20 mm
- > Max. wire bundle $\varnothing 6$ mm
- > Steel
- > Order qty: 1 pc




Finish	Cat. No.
Chrome-plated	912.02.015

Door loop, surface mounted



- > For running cable from door frame to door
- > Surface mounted between door and frame
- > 7 mm internal diameter
- > 10 mm external diameter
- > Stainless steel loop and ends
- > Order qty: 1 pc



Finish	Cat. No.
Stainless steel	912.02.016



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.

PAGE AMENDED
30.07.25/6