



Startec double panic bolt

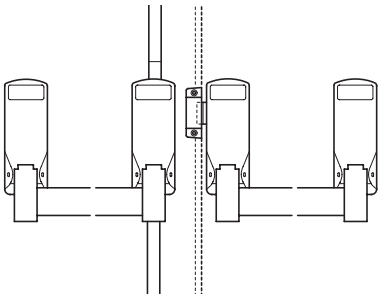

- > For double rebated outward opening doors up to max. 2400 mm high x 2440 mm wide
- > Push bar and shoots supplied with plugs for on-site cutting
- > Easy clean floor socket included
- > Anti-thrust device to prevent leverage of shoots
- > Shoot bolts automatically held retracted when door is in open position, and released on closing
- > Suits either hand
- > Exit only
- > Self adhesive vinyl 'Push bar to open' sign included
- > Diecast aluminium and mild steel. Epoxy powder coated finish
- > We are able to supply this product with passivate protection, larger sizes and micro-switches to order, subject to quantity
- > Can be used with an outside access device
- > Set consists of:
 - 1 x Single panic bolt, shown on page 199
 - 1 x Single panic latch, shown on page 199
 - 1 x Box keeper, shown on page 203
- > Tested and approved to BS EN 1125:1997, A1:2001
- > Order qty: 1 set

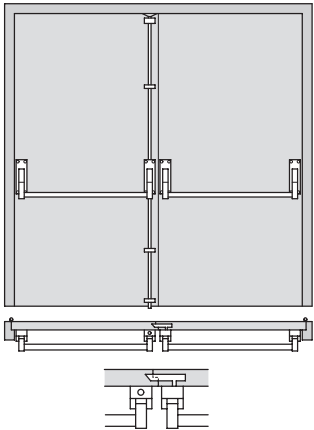


BS EN 1125									
3	7	6	1	1	3	2	2	A	



Finish	Cat. No.
Silver powder coated	911.52.319

Surface mounted keep for timber frames

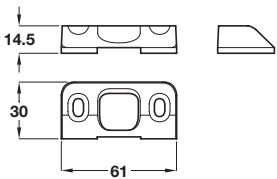

- > Surface mounted for bottom shoot bolts of panic bolt shown above
- > No clearance hole in the floor is required
- > Diecast zinc
- > Order qty: 1 pc

Finish	Cat. No.
Electro galvanised	911.52.124



We strongly recommend the use of hinge bolts or security hinges with panic hardware



- > Outside access devices are shown on pages **214-215**
- > Signage associated with panic exit devices, i.e. 'Push bar to open' and 'Fire escape keep clear' see **Section 2** pages **128-135**



Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.