


Multipoint mortice cylinder 3 point lock, deadbolt, latchbolt



- > Latchbolt operated by lever handles. Deadbolts operated by lifting lever and the deadlocking by cylinder
- > Cases: Steel, BZP CR3 passivate, 14.5 mm thick
- > Front plate: Square, 1 piece. Steel, BZP CR3 passivate 2250 mm x 16/20 mm wide
- > Keeps: Not included, order separately
- > Latchbolt: Brass, satin chrome plated. Reversible
- > Deadbolt: Brass, satin chrome plated. 22 mm throw
- > Linear bolts: Forged brass, satin chrome plated. 22 mm overall throw
- > Follower: 8 mm brass. For use with standard 92 mm unsprung lever handles
- > Not suitable for rebated doors
- > Designed to meet the requirements of PAS 23 and PAS 24
- > Order fixing screws separately
- > Order qty: 1 pc

Length with shoot bolts added			
		Minimum	Maximum
Backset 35 mm			
2250 x 16 mm	911.50.786	1915 mm	2109 mm
Backset 45 mm			
2250 x 16 mm	911.50.787	1915 mm	2109 mm
2250 x 20 mm	911.50.788	Will not accept shoot bolts	

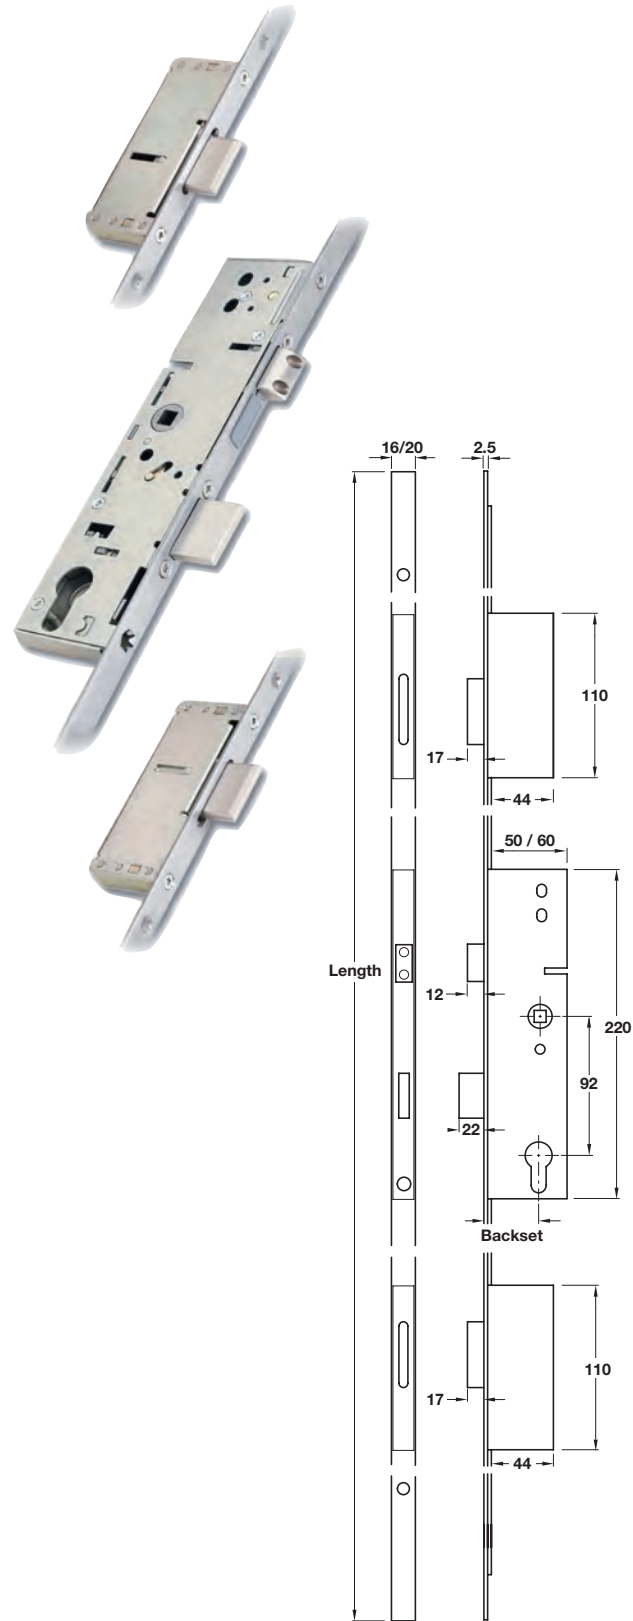

Front plate length x width	Cat. No.
Backset 35 mm	
2250 x 16 mm	911.50.786
Backset 45 mm	
2250 x 16 mm	911.50.787
2250 x 20 mm	911.50.788

- > Keeps are shown on pages 45-46. Order cylinders separately, see pages 65-77
 - > Optional shoot bolt engagement for additional security available, shown on page 47
 - > Multipoint lock standard 92 mm unsprung lever handles are shown in Section 1 on pages 97-100
- All moving parts should be lightly lubricated using a light non-acidic mineral oil (eg. "3 in 1"), twice per year and surface cleaned with a soft damp cloth. The locks may need to be adjusted and fixings tightened to ensure a satisfactory operation